MISSING SHEET

DISTRICT	COUNTY	ROUTE	SECTION
VIII	RIV	43	RIV

To accompany plans dated

Approval Recommended

Assistant State Highway Engineer - Bridges

Assistant State Highway Engineer - Operations

Approved June 30, 1960

State Highway Engineer
Civil Engineer License No. 5945

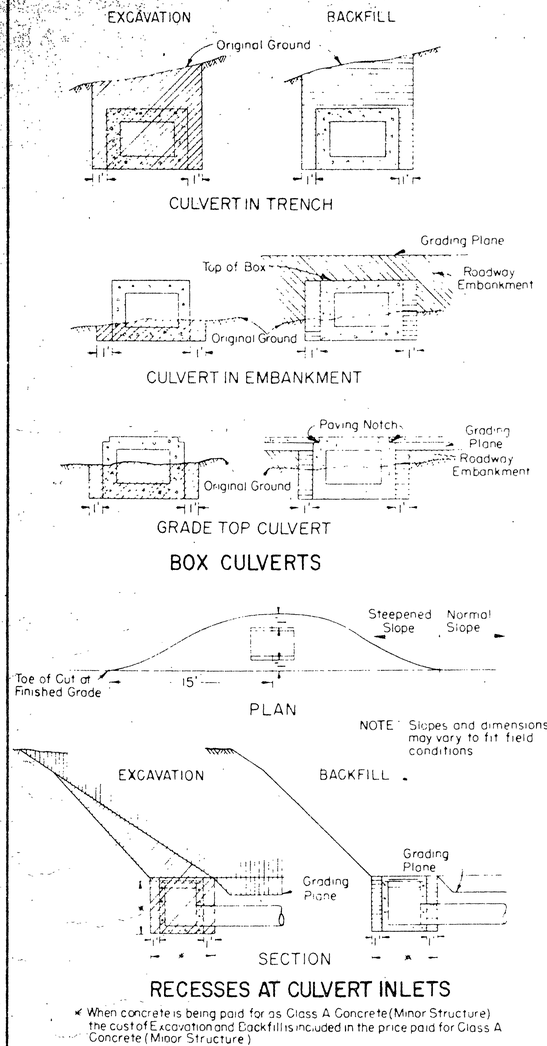

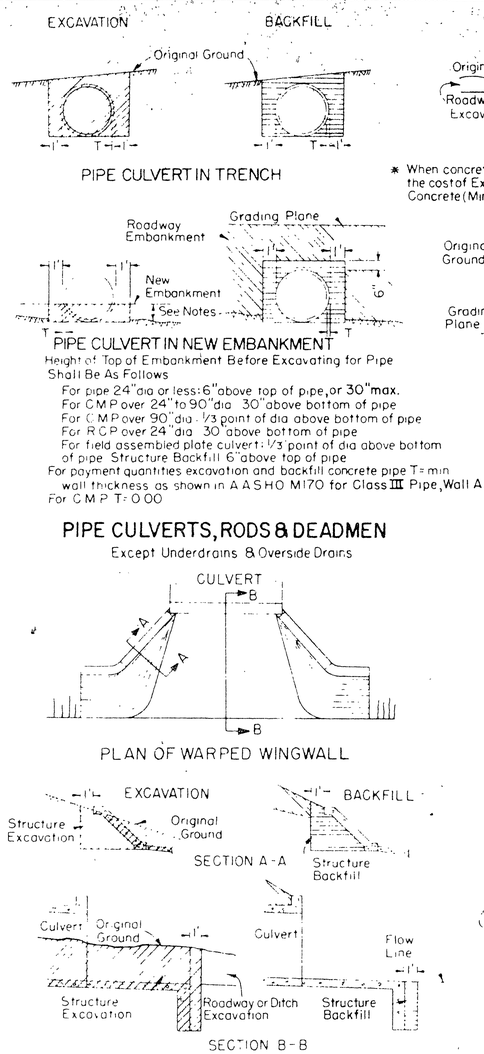

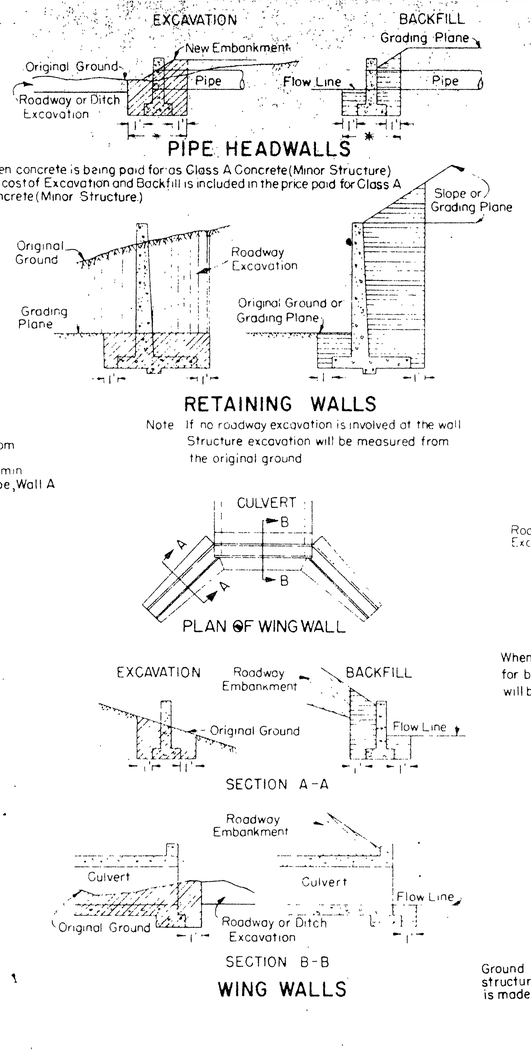

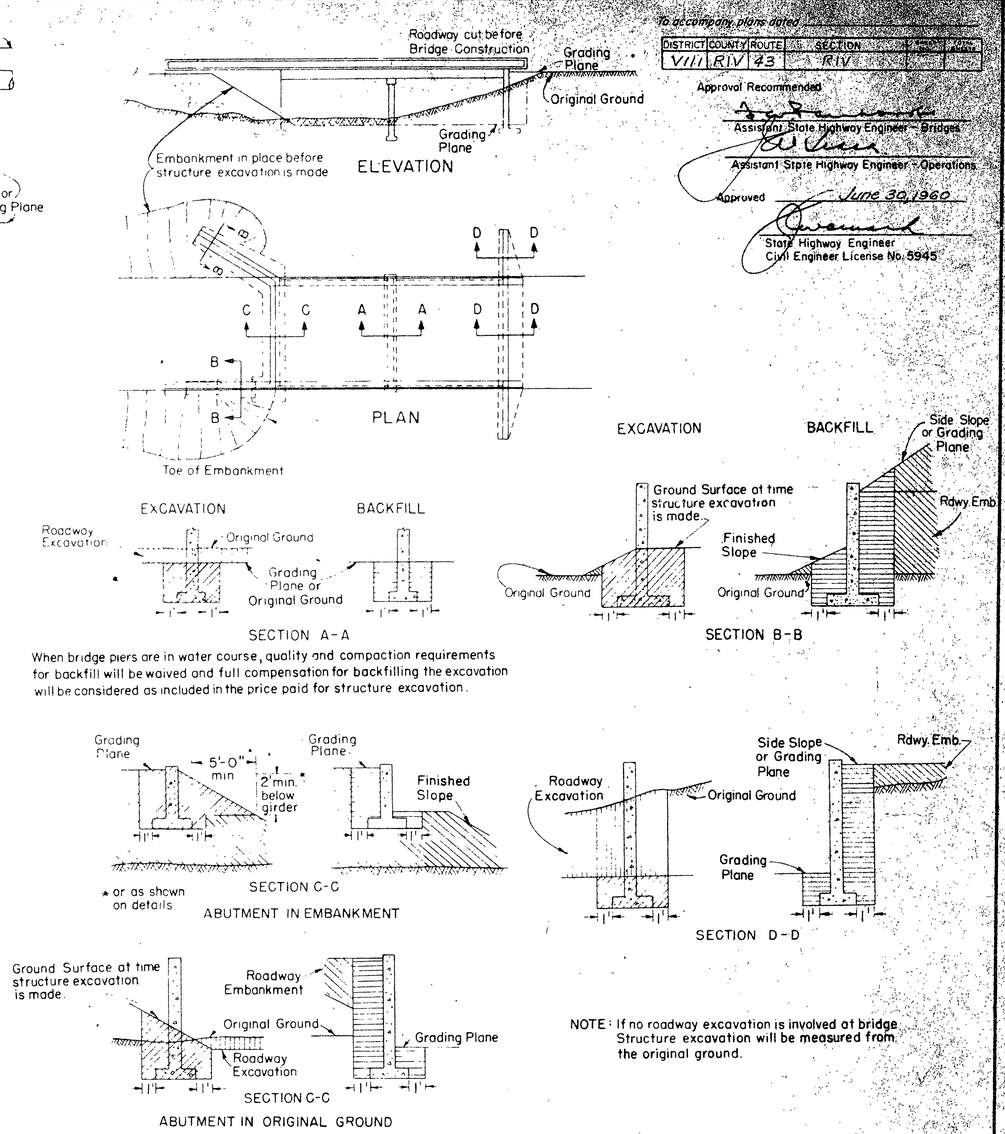

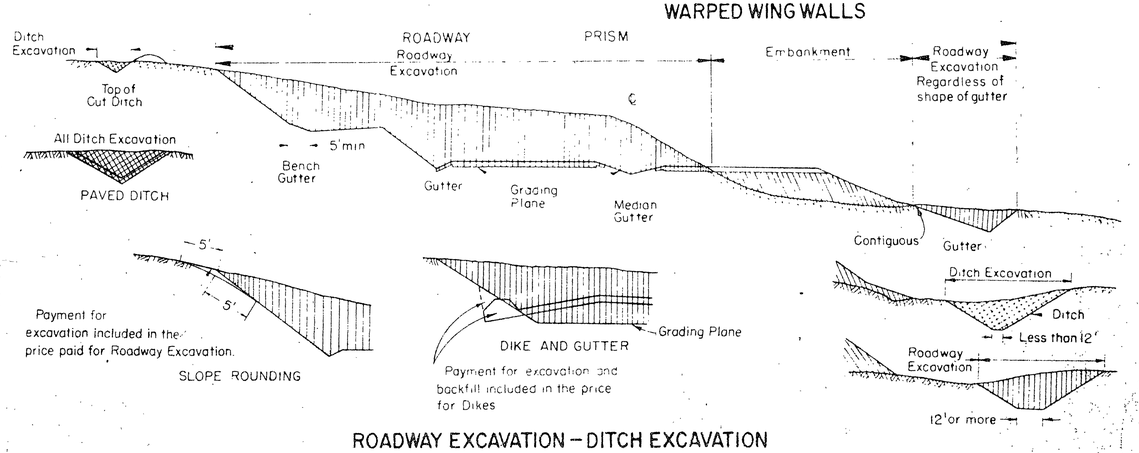

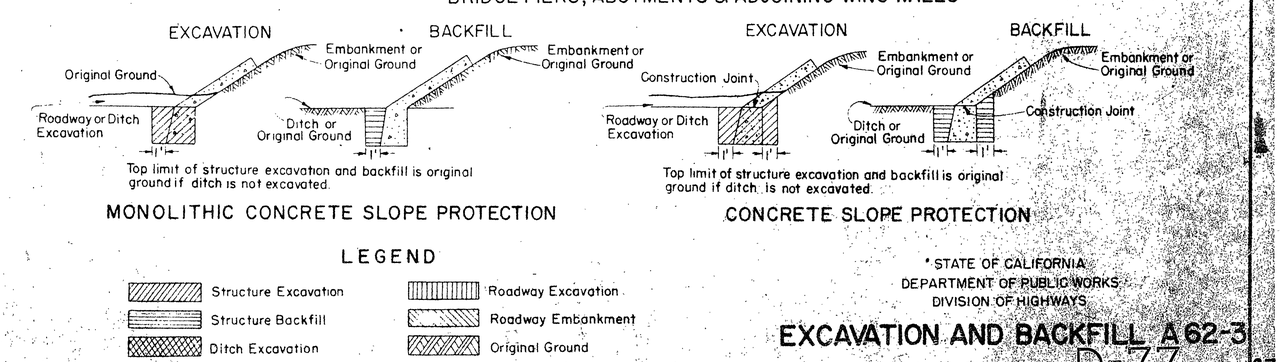

LEGEND

- Structure Excavation
- Structure Backfill
- Ditch Excavation
- Roadway Excavation
- Roadway Embankment
- Original Ground

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC WORKS
DIVISION OF HIGHWAYS

EXCAVATION AND BACKFILL A62-3

D-77 Sh. 2 of 3

FEDERAL AID PROJECT NO.	REGION NO.	STATE	NO.	SHEETS
I-015-3(7)163	7	CALIF.		

To accompany plans dated _____

DIST.	COUNTY	ROUTE	SECTION	POST MILE	POST MILE
VIII	RIV.	43	RIV.		

APPROVAL RECOMMENDED

W. L. Warren
Engineer of Design
Civil Engineer License No. 7503

Approved April 25, 1961

Jerham
Deputy State Highway Engineer
Civil Engineer License No. 2513

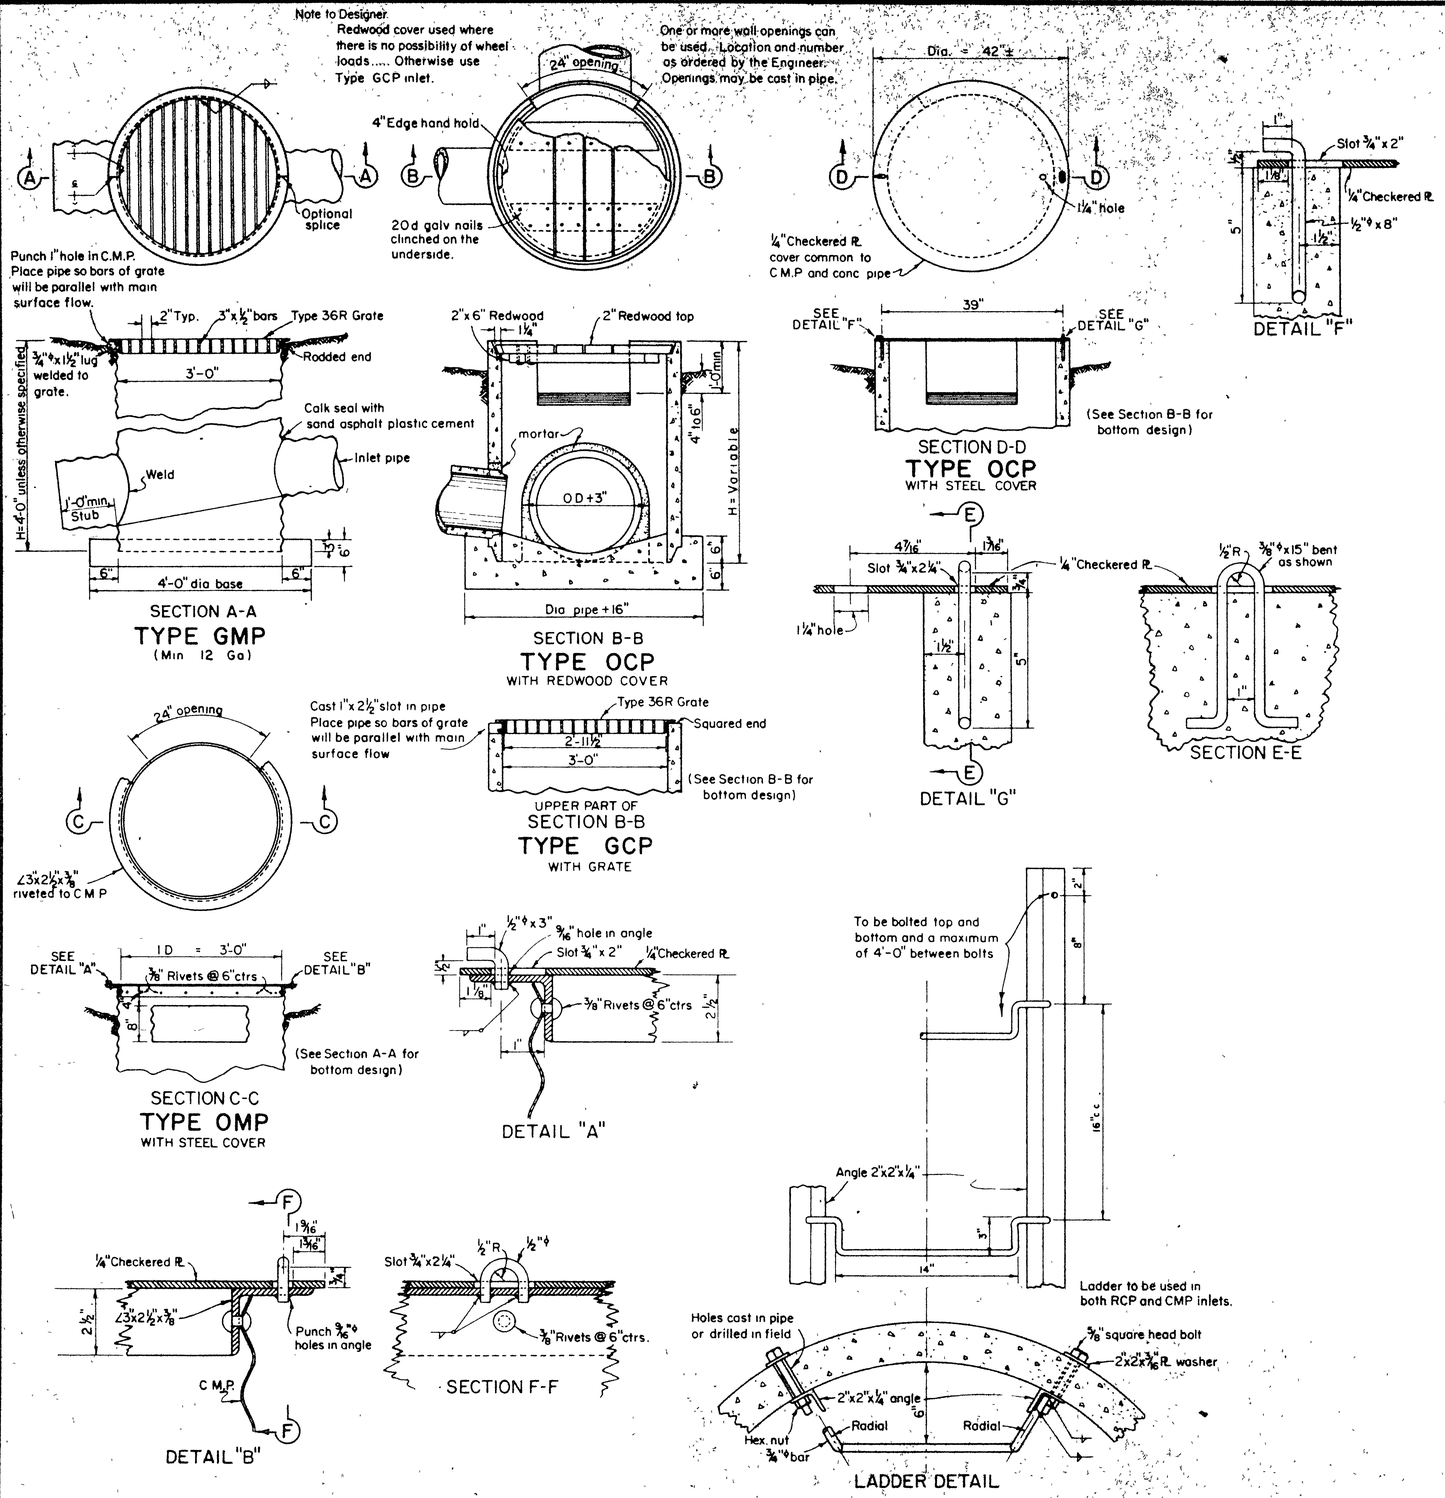

GENERAL NOTES

1. Steps – None required where "H" is 3'-6" or less. Install one step 16" above floor when "H" is more than 3'-6" and less than 5'-0". Where "H" is more than 5'-0", steps shall be evenly spaced @ 16" intervals from 16" above floor to within 12" of the top of the box. Place steps in wall without pipe openings.
2. Inlet pipes shall not protrude more than 1½"± into basin.
3. Except for inlets used as junction boxes, basin floors shall have a minimum slope of 12:3 from all directions toward outlet pipe, and a wood trowel finish.
4. Galvanizing, see Standard Specifications or Special Provisions.
5. See "Standard Plan" D77- for Grate and Frame Details

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC WORKS
DIVISION OF HIGHWAYS

STANDARD PIPE DROP INLETS

D75-1

D-77 Sh. 3 of 3