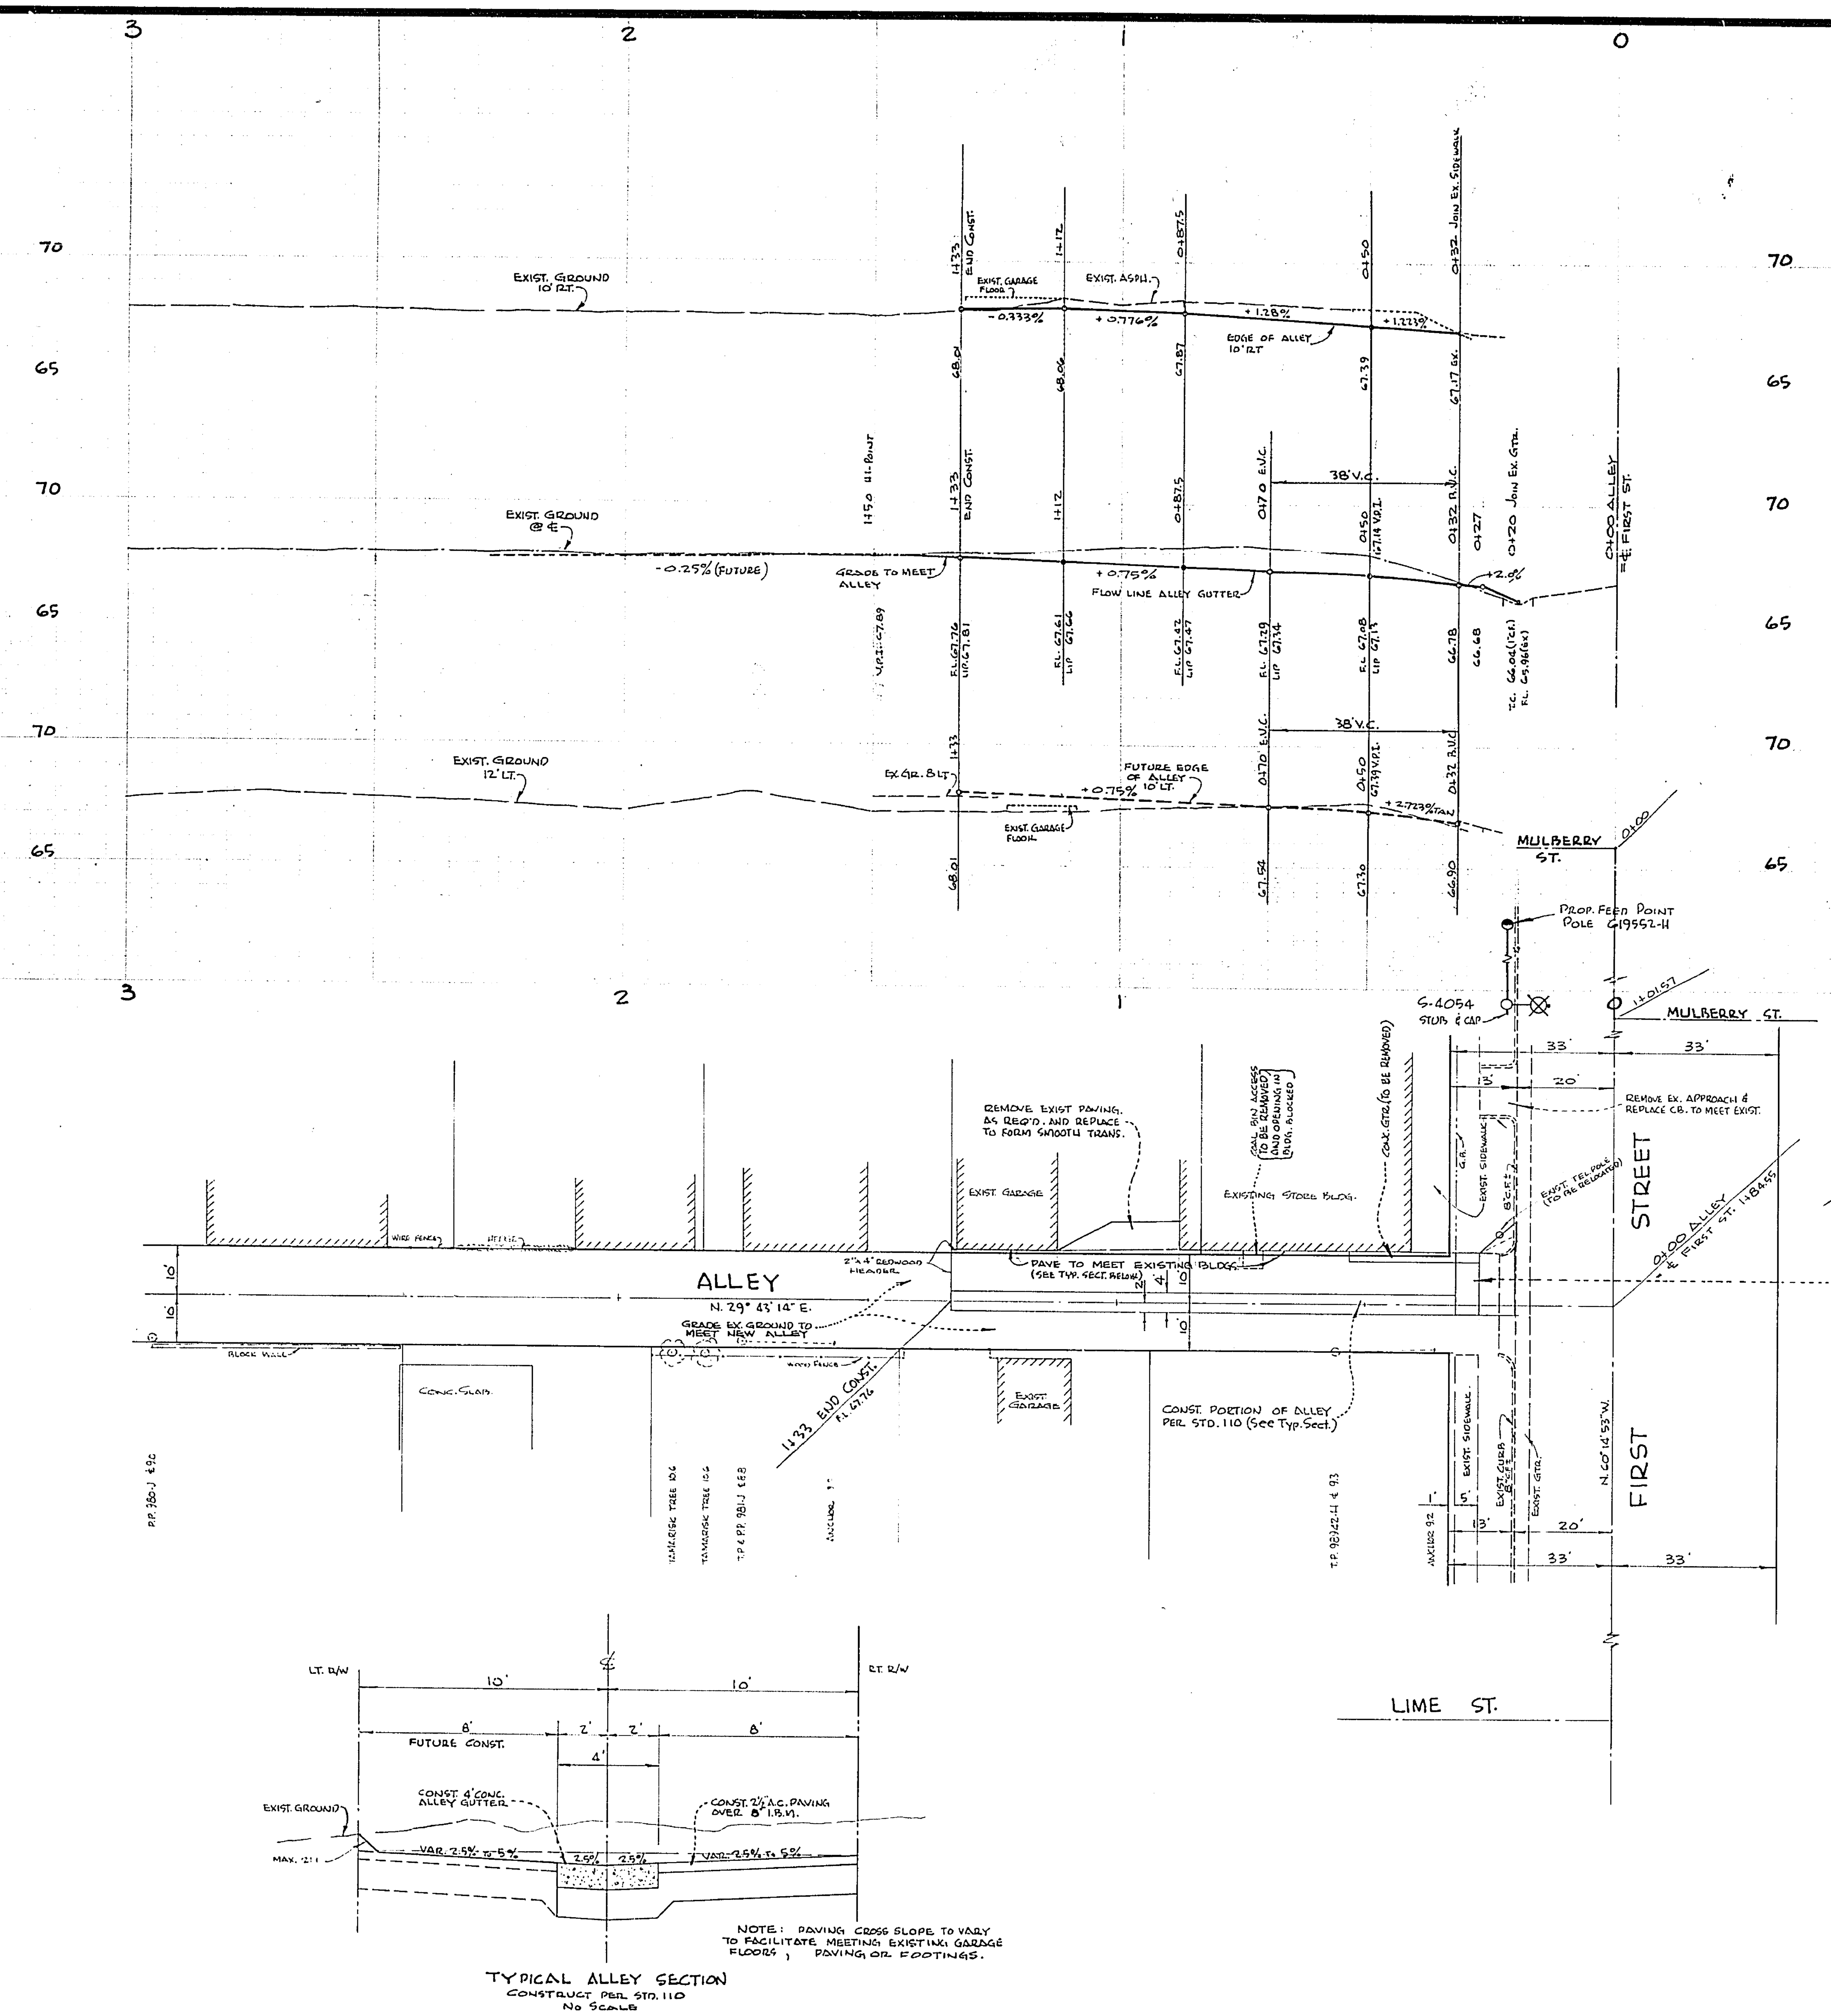

QUANTITY ESTIMATE

CURB ONLY - 8' C.F.± - TO JOIN EXIST.	
DRIVEWAY APPROACH - STD. 302 - (AS SHOWN)	1 EA.
ALLEY GUTTER - 4' CONC. - STD. 110	101 L.F.
2½" A.C. PAVING	1050 S.F.
IMPORTED BASE MATERIAL	20 C.Y.
REMOVE EXIST. CURB, GUTTER, SIDEWALK, & PAVING & DRIVEWAY APPROACH	L.S.
REMOVE EXIST. COAL BIN ACCESS	L.S.
2"x 4" REDWOOD HEADER	9 L.F.

(A) ALL STREET LIGHT STANDARDS AND PULLBOXES TO BE LOCATED IN THE FIELD.

(B) ALL STREET LIGHT STANDARDS SHALL BE CHECKED FOR CLEARANCE OF DRIVEWAYS AND PLACED 1' FROM END OF CURB RETURNS.

(C.) SEE CITY OF RIVERSIDE DRG. No. LI-13008 FOR LIGHT STANDARD DETAILS.

(D) ALL CABLE TO BE AWG NO. 8 COPPER.

(E) THIS IS A 2 WIRE, 120 VOLT MULTIPLE SYSTEM.

(F) ALL CONSTRUCTION TO COMPLY WITH CITY OF RIVERSIDE STREET LIGHT SPECIFICATIONS.

(G) INSPECTION SHALL BE CALLED FOR AS OUTLINED IN SPECS.

(H) FEED POINT TO BE CONFIRMED AT TIME OF CONSTRUCTION.

(I) $75.00 CONNECTION FEE PAID 10-7-65.

INDICATES CITY OF RIVERSIDE MARBLELITE LIGHT STANDARD NO. 15D4 WITH 10,000L, 250W, TYPE III "LINE MATERIAL" MERCURY VAPOR LUMANAIRE WITH INDIVIDUAL PHOTO ELECTRIC RECEPTACLE AND CONTROL UNIT. CAT. NO. LM4GA2.

INDICATES 1" RIGID GALV. STEEL CONDUIT, EXCEPT AS NOTED.

INDICATES FEED POINT.

APPROVED BY Don Campbell
GEN. SUPT. & CHIEF ENGINEER
DATE Oct. 6, 1965

ALBERT A. WEBB ASSOCIATES
CIVIL ENGINEERS
RIVERSIDE, CALIFORNIA
APPROVED BY [signature] DATE 8/17/65
R.E. No. 9876
W.O. 65-239 FOR: FRED S. MILLER F.B. 558/68

MARK	REVISIONS	APPR.	DATE

DESIGNED BY D.R.B. DRAWN BY D.R.B. CHECKED BY [initials]

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

APPROVED BY	BY	DATE
OFFICE ENGINEER	[initials]	11-15
PARK DEPARTMENT		
TRAFFIC DIVISION	[initials]	11-2-65
ASSISTANT CITY ENG.	[initials]	11-15
	[initials]	11-10

APPROVED BY [signature]
DIRECTOR OF PUBLIC WORKS
DATE 11-15-65

STREET PLAN AND PROFILE
ALLEY
NORTHERLY FROM FIRST STREET
BETWEEN MULBERRY ST. & LIME ST.
ZONING CASE R-121-645

HORIZ. SCALE: 1" = 20' VERT. SCALE: 1" = 4'

PROJECT NO. L5-13115
R-1087
SHEET 1 OF 1
FILE NO. 65-239A