




GENERAL CONSTRUCTION NOTES:

- EXISTING UTILITIES, SHOWN ON THIS PLAN, ARE PLOTTED FROM UTILITY RECORDS. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO LOCATE AND PROTECT ALL UTILITIES WHETHER OR NOT SHOWN ON THIS PLAN. IF THE COVER OF A UTILITY IS KNOWN IT IS SHOWN IN THE PROFILE. UTILITIES SHOWN IN THE PROFILE AS: () (UTILITY NAME) INDICATES THAT COVER IS UNKNOWN, BUT THE UTILITY IS NOT EXPECTED TO CONFLICT WITH IMPROVEMENTS.
- THE EXISTING 36" R.C.P. AT 17+92.2 ± COLLETT SHALL BE UNCOVERED BY THE CONTRACTOR AND THE LOCATION CHECKED BY THE SURVEYORS BEFORE GRADE SHEETS WILL BE ISSUED.
- SEE STANDARD DRAWING NO. 1 FOR UNDERGROUND AND TOPO LEGEND.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO REPAIR OR REPLACE IN KIND AT HIS OWN EXPENSE ANY IMPROVEMENTS DAMAGED BY HIS OPERATIONS DURING CONSTRUCTION.
- WHERE NEW CONSTRUCTION IS INDICATED:
A. REMOVE EXISTING CURB & GUTTER
B. REMOVE ALL EXISTING A.C. PAVEMENT EXCEPT WHERE OVERLAY OF EXISTING PAVEMENT IS SHOWN ON THE PLAN.
- CURB & GUTTER REMOVAL SHALL BE TO THE LIMITS SHOWN ON THE PLAN OR TO THE NEAREST CONSTRUCTION JOINT BEYOND THE PLAN LIMITS AS DIRECTED BY THE INSPECTOR.
- ALL ELEVATIONS SHOWN ON THE PLAN SHALL BE STAKED IN THE FIELD.
- UTILITIES CROSSED BY PROPOSED STORM DRAIN PIPES TO BE LOCATED IN THE FIELD BY CONTRACTOR PRIOR TO ISSUANCE OF GRADE SHEETS.
- EXISTING UTILITIES SHOWN IN CONFLICT WITH THE PROPOSED IMPROVEMENTS WILL BE RELOCATED BY OTHERS PRIOR TO CONSTRUCTION.

CONSTRUCTION LEGEND:

- 200 CONSTRUCT CURB & GUTTER PER C/R STD. DWG. 200 TYPE I. CURB FACE TO BE CONSTRUCTED AS SHOWN ON PLAN.
- 407 CONSTRUCT CATCH BASIN PER C/R STD. DWG. 407, "D", "L" & "V" DIMENSIONS SHOWN ON PLAN.
- 408 CONSTRUCT CATCH BASIN PER C/R STD. DWG. 408, "W", "L" & "V" DIMENSIONS SHOWN ON PLAN.
- 452 PIPE BEDDING PER C/R STD. DWG. 452. PIPE BEDDING & CLASS SHALL BE PER TABLE BELOW:

SIZE	PIPE	CLASS	BEDDING
24"	R.C.P.	2500-D	CASE-I
15"	R.C.P.	2500-D	CASE-I
- 453 TRENCH BACKFILL & RESURFACING SHALL BE PER C/R STD. DWG. 453. REGRADE PARKWAY & VACANT LAND TO ORIGINAL CONDITION AFTER CONSTRUCTION. PRIME COAT WILL NOT BE REQUIRED.
- 1 CONSTRUCT STRUCTURAL SECTION OF 0.30' A.C. OVER 0.50' DEPTH MATERIAL OR 0.55' FULL DEPTH A.C. OVER NATIVE SOIL.
- 2 OVERLAY EXISTING A.C. PAVEMENT WITH A VARIABLE THICKNESS OF ASPHALT CONCRETE. 0.10' MIN.

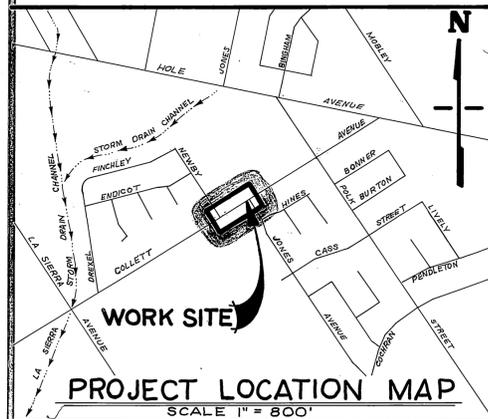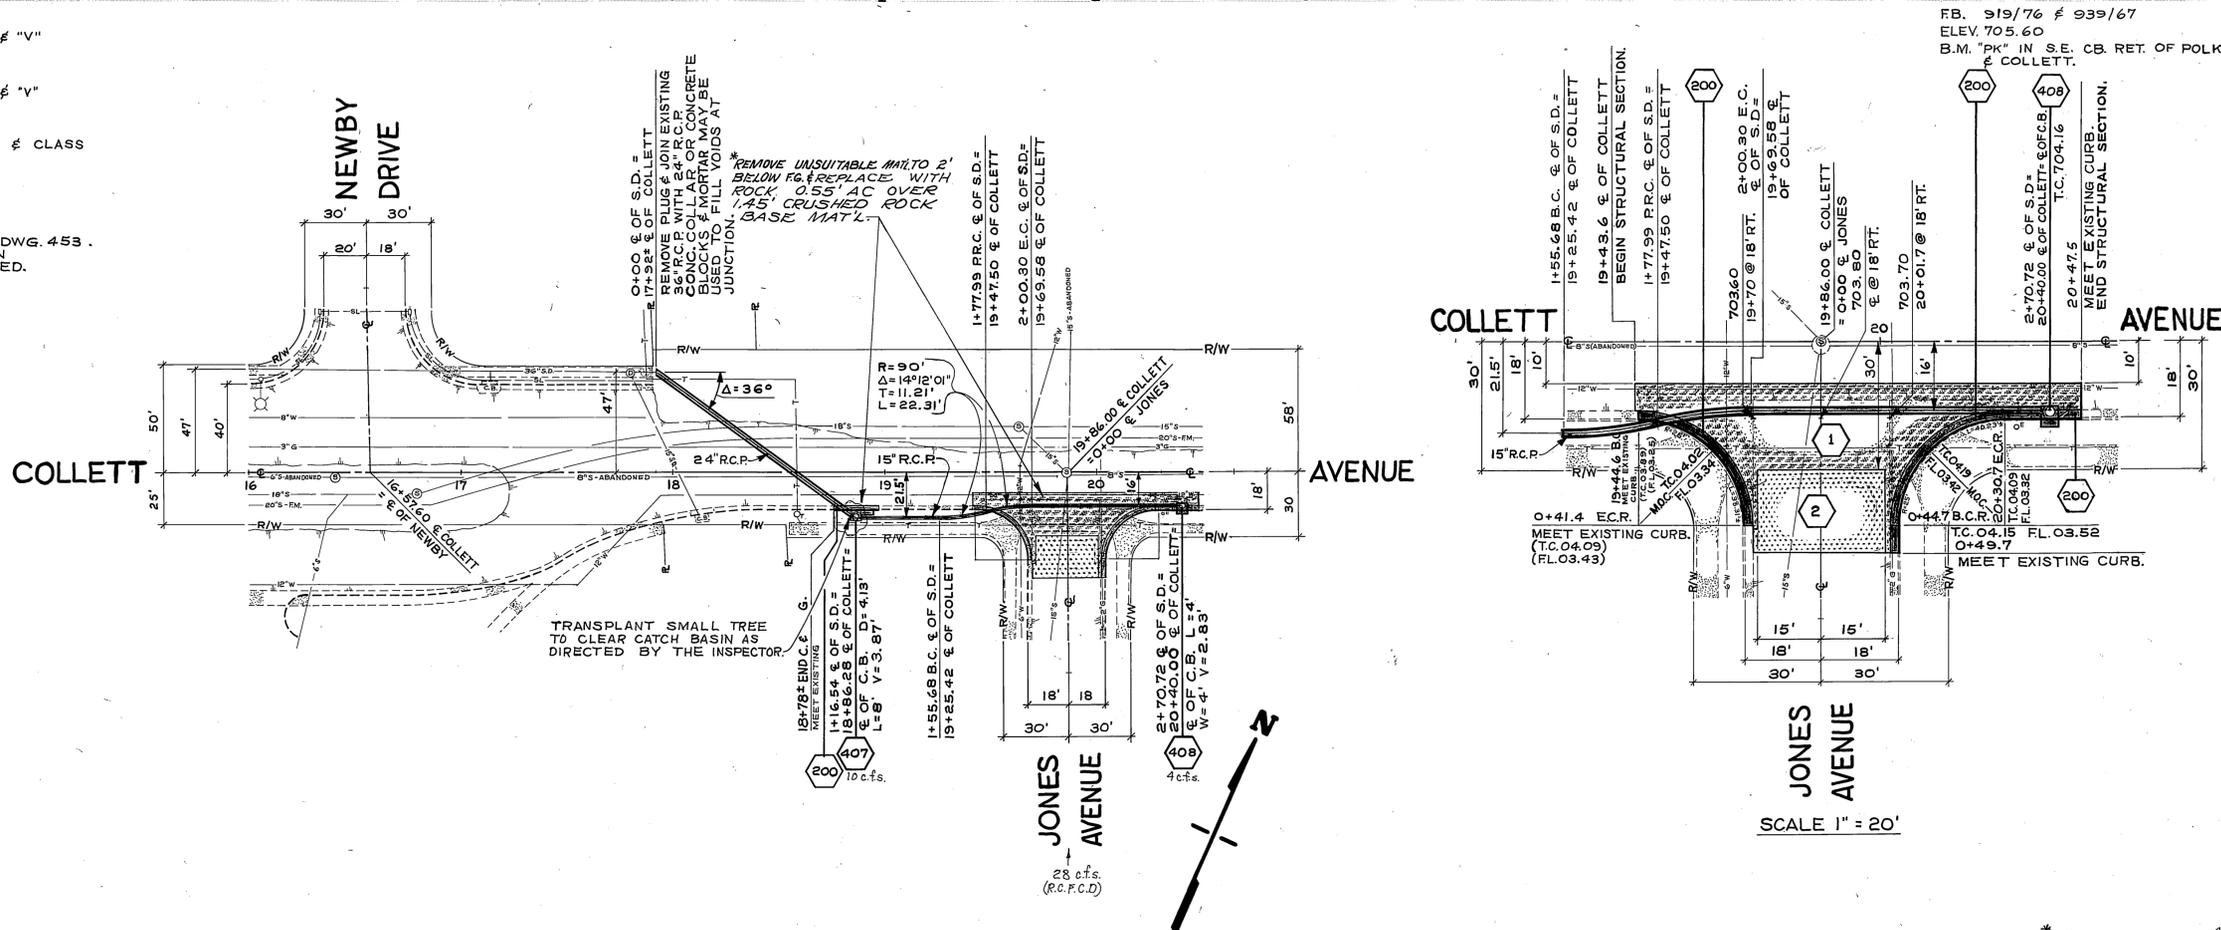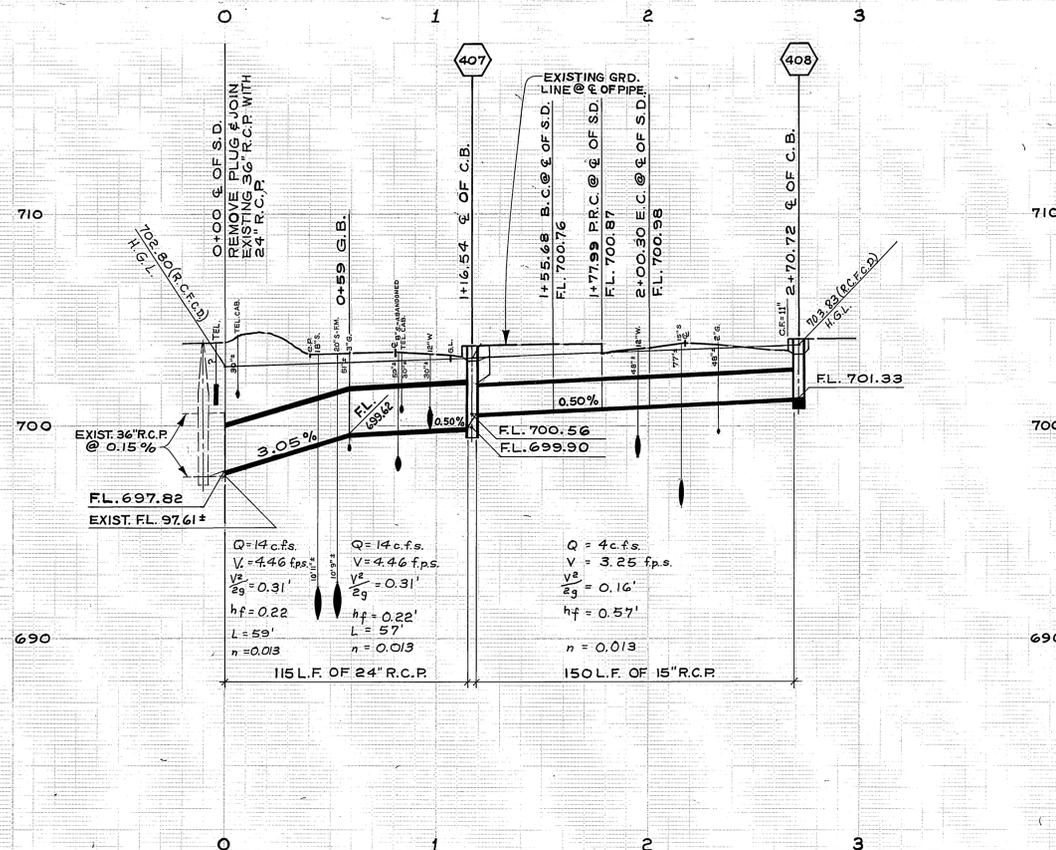

-CAUTION-
PACIFIC TELEPHONE
CABLES UNDERGROUND
BEFORE EXCAVATING
CALL COLLECT:
7:30 A.M. to 5 P.M.
Orange County 714-633-0811
Riverside County 714-684-0071

After Hours
& Holidays
714-547-6606
714-547-6606

CITY OF RIVERSIDE
PUBLIC WORKS DEPARTMENT

APPROVED BY: [Signature]
PRINCIPAL ENGINEER
DATE: 6-25-75

APPROVED BY: [Signature]
PUB. WORKS DIRECTOR
DATE: 6-25-75

DESIGNED BY: [Signature] DRAWN BY: [Signature] CHECKED BY: [Signature]

INDEXED

COLLETT AVENUE
STORM DRAIN
FROM NEWBY TO JONES

SCALE 1" = 40' HORIZ. SCALE: 1" = 40' VERT. SCALE: 1" = 4'

ACCOUNT NO. 09-573-472

D-230

SHEET 1 OF 1

FILE NO.