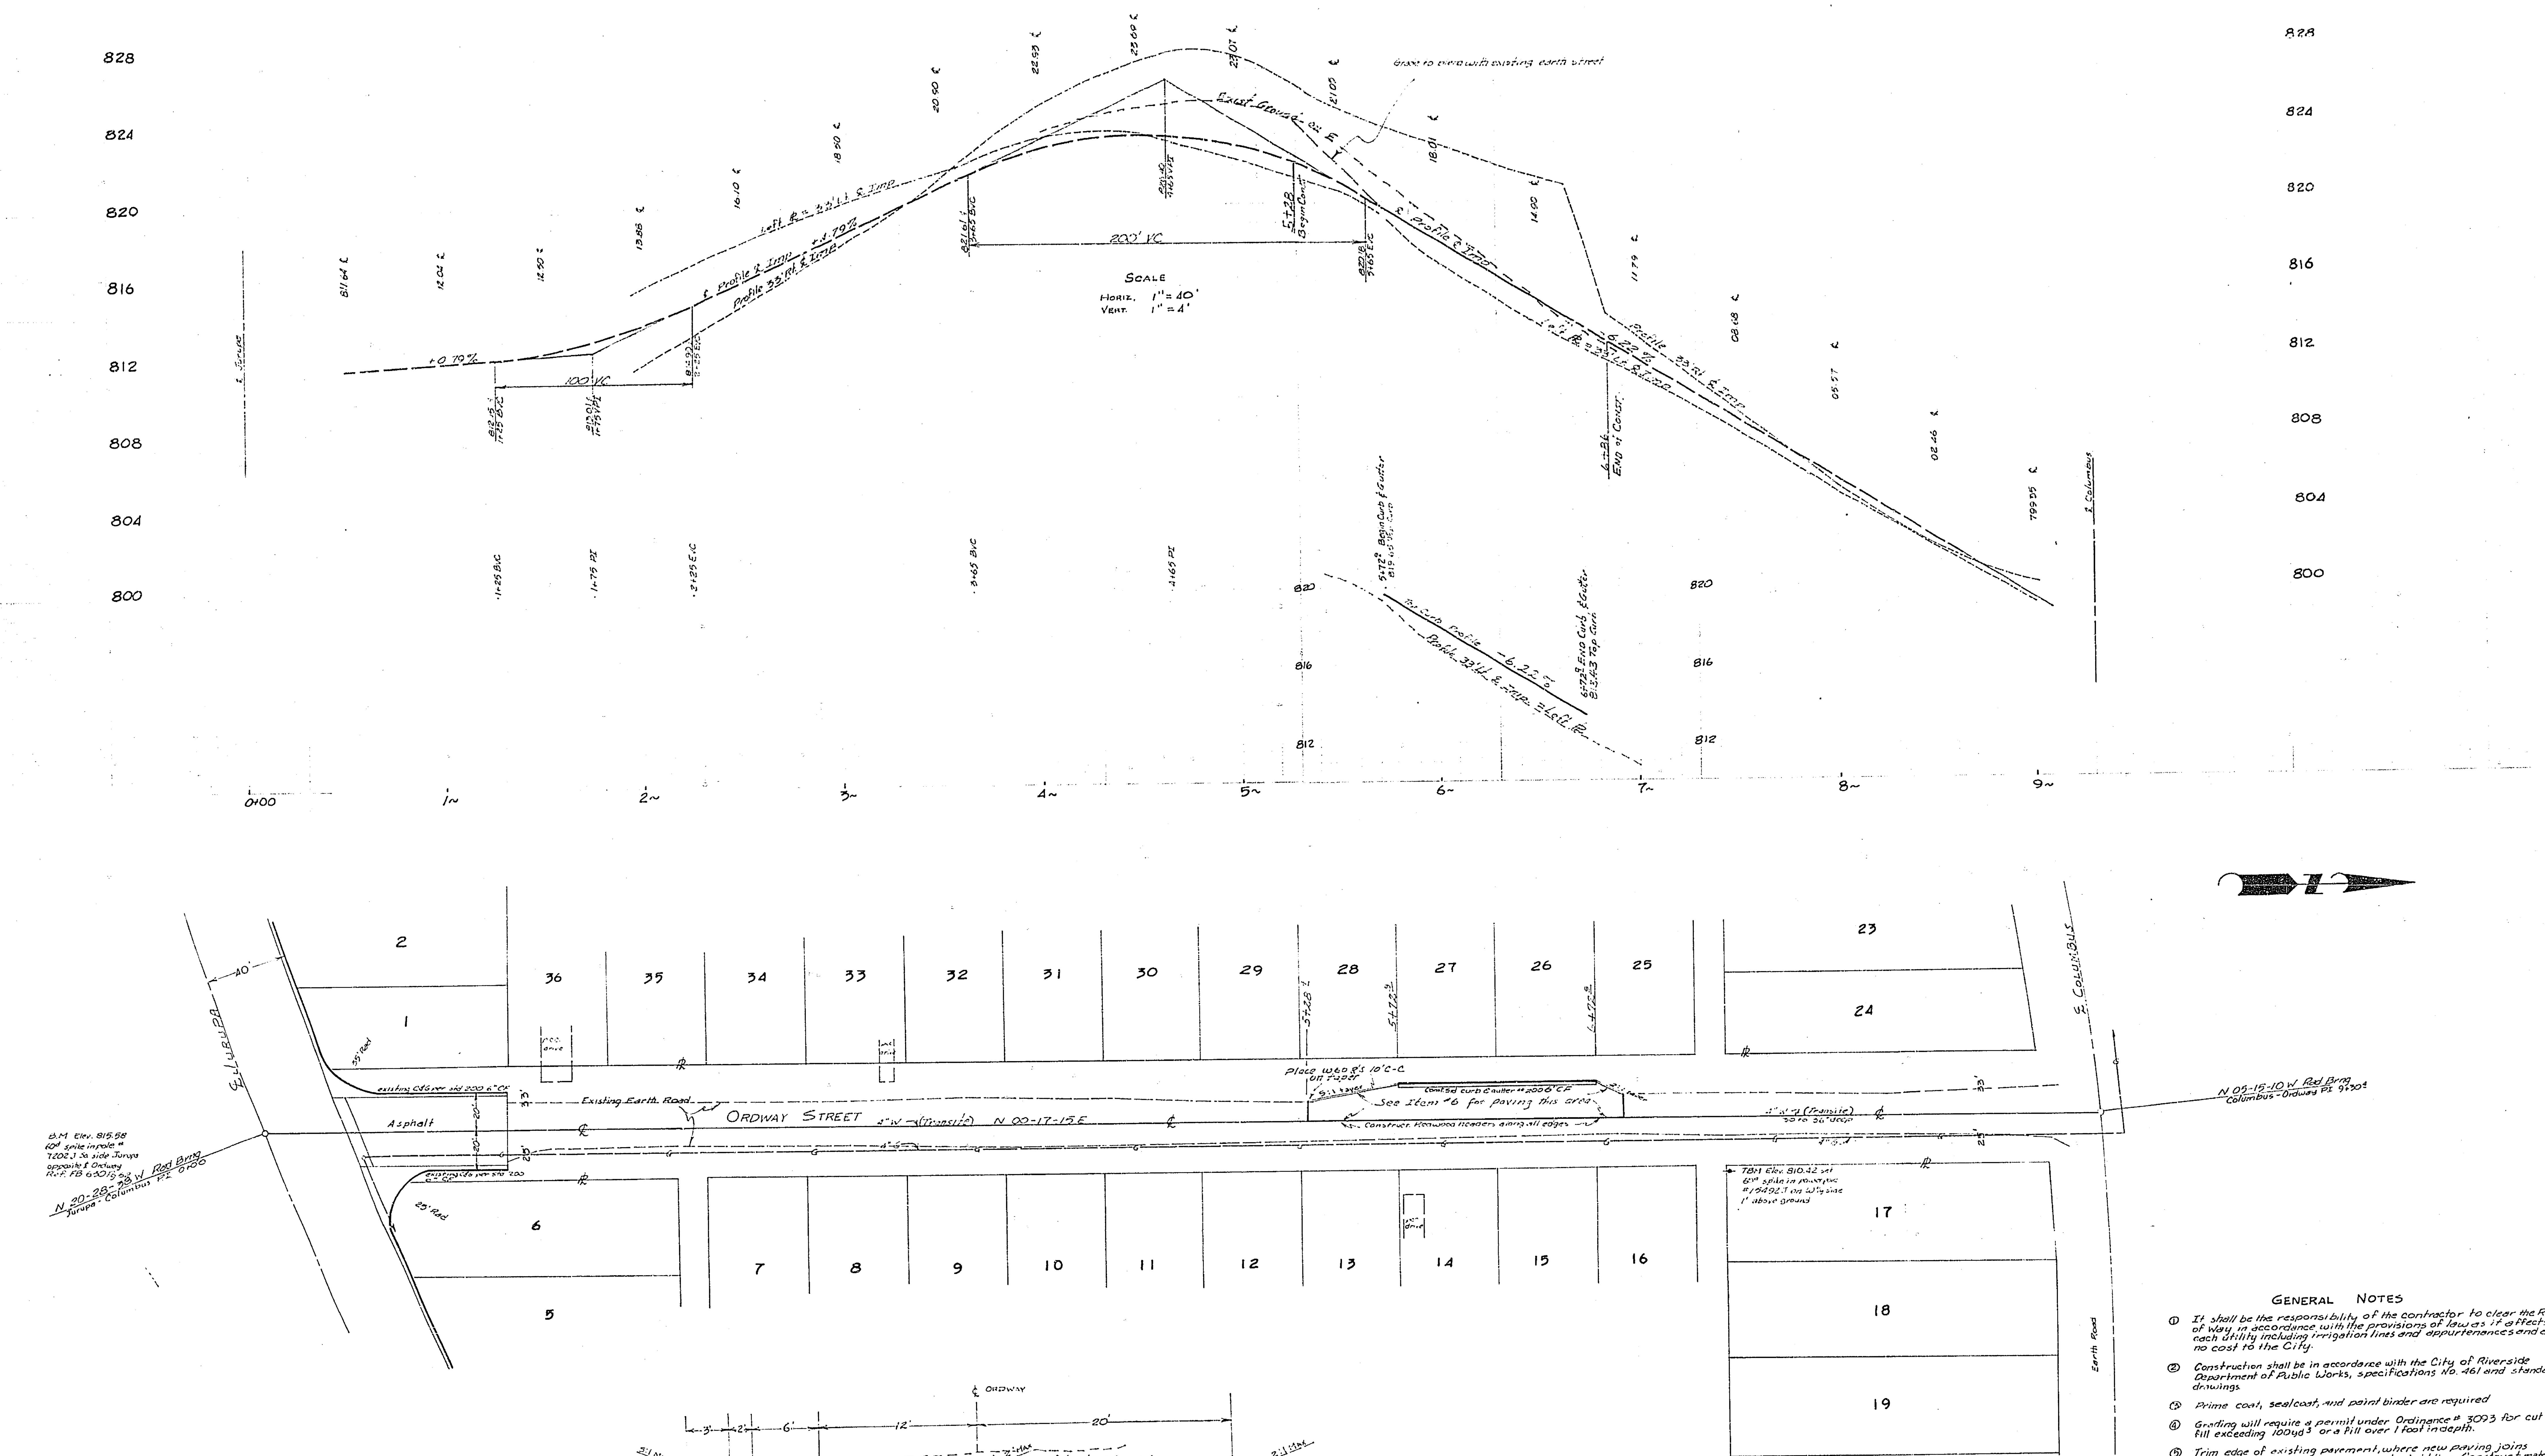

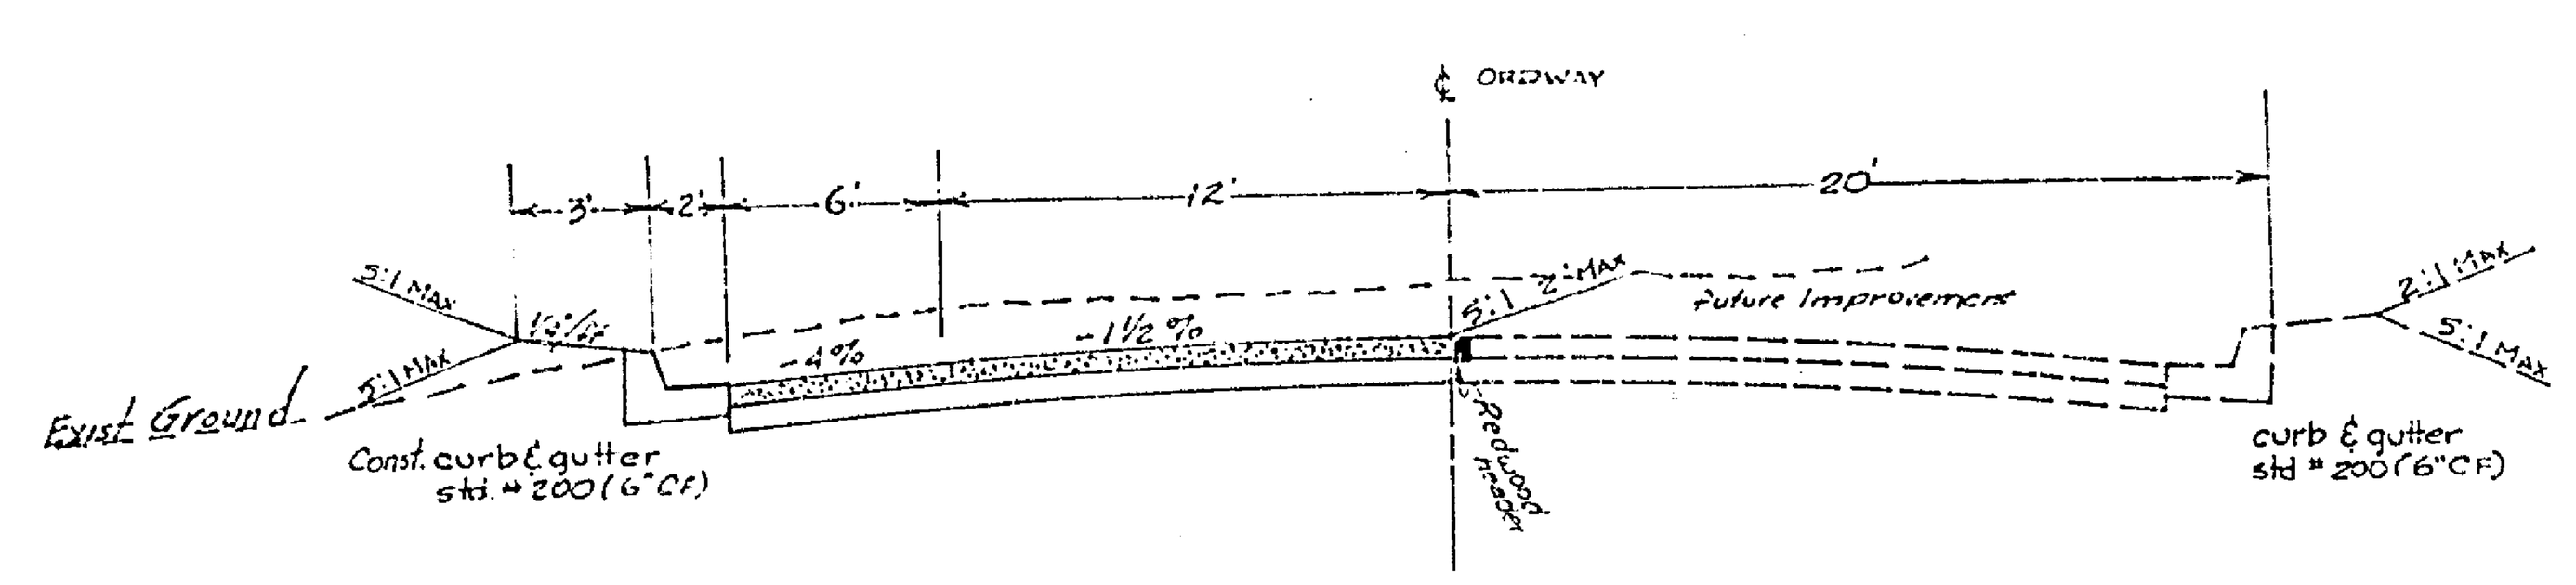

Typical X-Section of proposed Ordway St.
— No Scale —

For structural section see note 6
5+72.90 to 6+72.90
T.I. = 6

NOTICE TO CONTRACTOR

The existence and location of any underground utilities, pipes or structures shown on these plans are obtained by a research of the available records. To the best of our knowledge, there are no existing utilities except as shown on this plan.

The contractor is required to take due precautionary measures to protect the utility lines shown and any other lines not of record or not shown on this plan.

GENERAL NOTES

1. It shall be the responsibility of the contractor to clear the Right of Way in accordance with the provisions of law as it affects each utility including irrigation lines and appurtenances and at no cost to the City.
2. Construction shall be in accordance with the City of Riverside Department of Public Works, specifications No. 461 and standard drawings.
3. Prime coat, sealcoat, and paint binder are required.
4. Grading will require a permit under Ordinance # 3093 for cut or fill exceeding 100yd³ or a fill over 1 foot in depth.
5. Trim edge of existing pavement, where new paving joins existing pavements, to a clean, straight line. Construct match-up paving as shown and overlay paving as directed in the field to produce a smooth crown section. Engineer estimates the amount of overlay to be 0 tons.
6. The owner shall arrange for a soil test to be made by a soils engineer. After the streets have been prepared to rough grade depth of base material and the A.C. paving shall be determined by the City of Riverside Design Standards & Test Procedures.
7. Drive ways to be located in the field and constructed per standard drawing # 302.

Approved By ________ Date ________
RCE 11481

Prepared For C.A. ZEIGLER 5935 ORDWAY STREET, RIVERSIDE

MARK	REVISIONS	APPR.	DATE

DESIGNED BY ______ DRAWN BY ______ CHECKED BY BB

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

APPROVED BY	BY	DATE
OFFICE ENGINEER		
PARK DEPARTMENT		
TRAFFIC DIVISION		
ASSISTANT CITY ENG.		8-1

APPROVED BY [signature]
DIRECTOR OF PUBLIC WORKS
DATE 8-8-69

PLAN & PROFILE
ORDWAY STREET
Between Jurupa Ave. & Columbus Ave.

HORIZ. SCALE: 1" = 40' VERT. SCALE: 1" = 4'

PROJECT NO. R-1375

SHEET 1 OF 1

FILE NO.