



PROJECT AREA

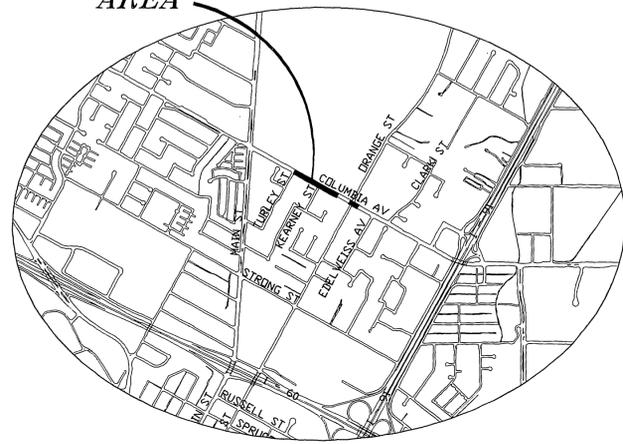

LOCATION MAP
NTS

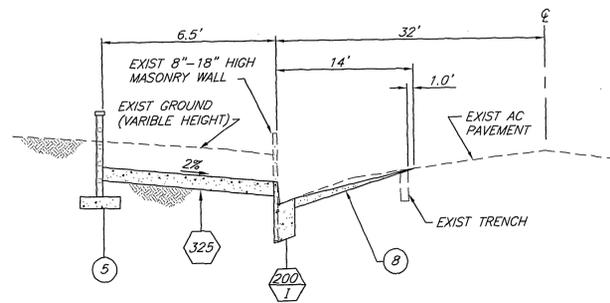


COLDMILLING SECTION BETWEEN KEARNEY ST. AND END OF SIDEWALK (140' E'LY OF TURLEY ST.)

COLDMILLING SECTION
NTS

GENERAL NOTES:

- EXISTING UTILITIES SHOWN ON THIS PLAN ARE PLOTTED FROM UTILITY RECORDS. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO LOCATE AND PROTECT ALL UTILITIES WHETHER OR NOT SHOWN ON THIS PLAN.
- CONTRACTOR SHALL GRADE BEHIND PROPOSED SIDEWALK TO ENSURE PROPER TRANSITION INTO THE LOT.
- CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE CITY OF RIVERSIDE DEPARTMENT OF PUBLIC WORKS, STANDARD DRAWINGS AND THE "STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION", 2006 EDITION.
- ANY TEMPORARY TRAFFIC CONTROL STRIPING OBLITERATED AND/OR BADLY WORN DURING CONSTRUCTION SHALL BE RESTORED BY THE CONTRACTOR WITHIN ONE DAY AFTER NOTIFICATION FROM THE CITY INSPECTOR.
- WHERE NEW PAVEMENT IS TO JOIN THE EXISTING PAVEMENT, THE EDGE OF THE EXISTING PAVEMENT SHALL BE TRIMMED IN A SMOOTH AND STRAIGHT LINE. CONSTRUCT MATCH-UP PAVING AS DIRECTED IN THE FIELD TO PRODUCE A SMOOTH SECTION.
- SURVEY STAKING REQUESTS AND GRADE SHEETS ARE REQUIRED FOR THE REPLACEMENT OF ALL CURBS AND/OR GUTTER OVER 50' IN LENGTH. SURVEY REQUESTS SHALL BE SUBMITTED AFTER THE EXISTING IMPROVEMENTS HAVE BEEN REMOVED. CONTRACTOR SHALL ALLOW 4 WORKING DAYS AFTER REQUESTING SURVEY TO SCHEDULE SURVEY AND PROCESS GRADE SHEETS. CONTRACTOR SHALL PROVIDE TRAFFIC CONTROL FOR ALL REQUIRED CONSTRUCTION SURVEY WORK BY CITY PERSONNEL.

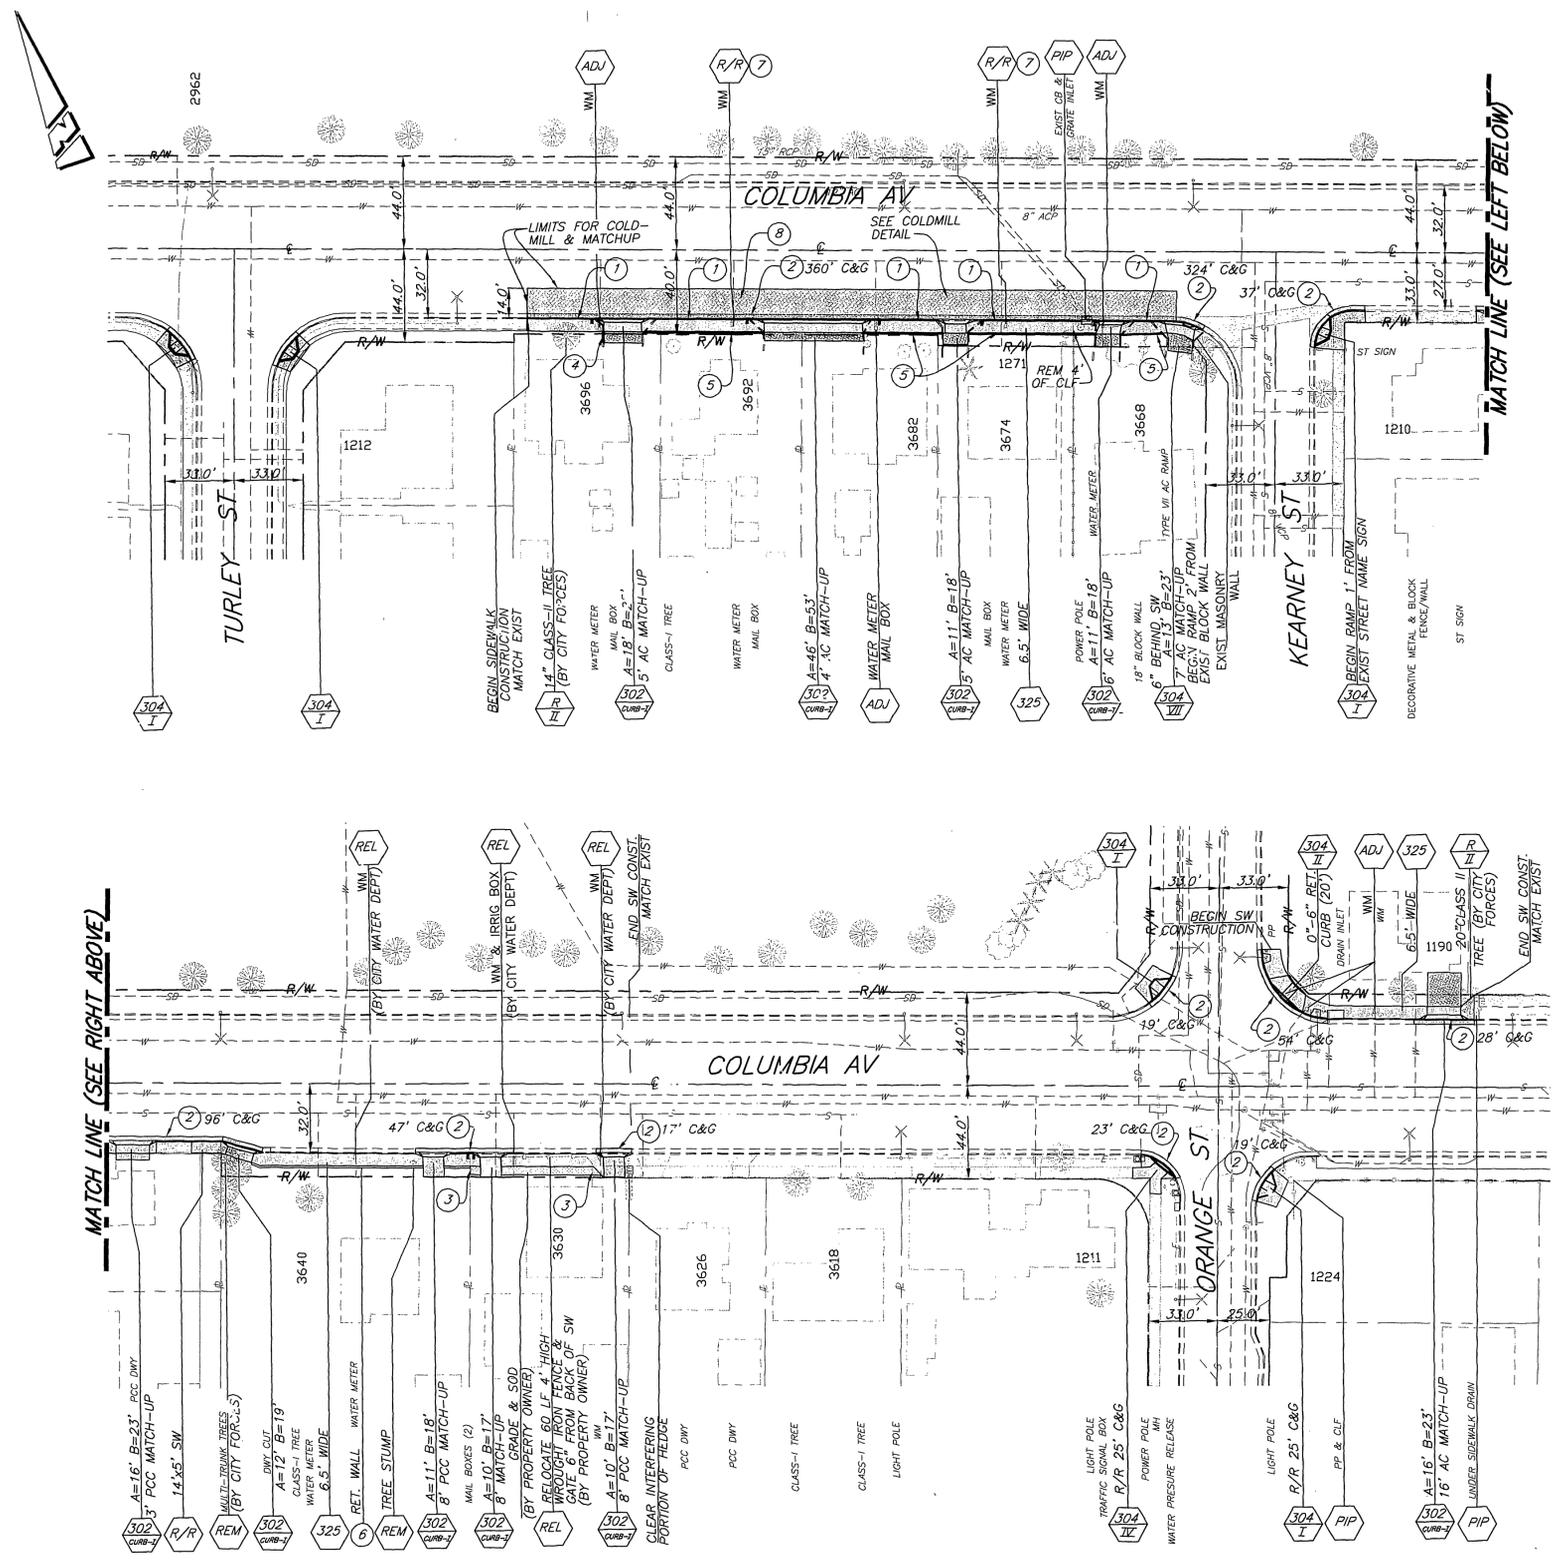

CONSTRUCTION NOTES:

- NUMBERS ABOVE 100 IN A HEXAGON ON THE PLAN REFER TO THE RESPECTIVE STANDARD DRAWING AND SHALL BE CONSTRUCTED ACCORDINGLY. UNLESS MODIFICATIONS ARE NOTED ON THE PLAN OR COVER SHEET, ANY NUMBER SHOWN BELOW THE STANDARD DRAWING NUMBER INDICATES THE SPECIFIC ALTERNATE TO BE CONSTRUCTED.
- REL RELOCATE EXISTING SIGN, TREE OR OBJECTS, AS SHOWN ON PLANS AND/OR AS DIRECTED BY THE ENGINEER TO PROVIDE REQUIRED CLEARANCE.
- REM REMOVE AND DISPOSE EXISTING IMPROVEMENTS OR OBJECTS IN CONFLICT WITH PROPOSED CONSTRUCTION AND/OR IMPROVEMENTS.
- PIP PROTECT IN PLACE
- ADJ ADJUST EXISTING MANHOLES AND WATER METERS BOXES TO GRADE. REPLACE ALL PLASTIC WATER METER BOXES WITH CONCRETE WATER METER BOXES. CONCRETE WATER METER BOXES SHALL BE PROVIDED BY THE CITY AND CONTRACTOR SHALL ARRANGE FOR PICK UP FROM THE CITY CORPORATION YARD LOCATED AT 8095 LINCOLN AVE, CITY OF RIVERSIDE.
- 325 CONSTRUCT PCC SIDEWALK PER CITY STANDARD DWG 325. ADJUST IRRIGATION SYSTEM AS NECESSARY TO MEET NEW CONDITIONS
- R/R REMOVE AND REPLACE EXISTING IMPROVEMENTS AS INDICATED ON THE PLANS. LOCATIONS FOR NEW TREES SHALL BE AT THE BACK OF THE PROPOSED SIDEWALK OR AS DIRECTED BY THE ENGINEER.
- R/T REMOVE TREE BY CITY FORCES. CONTRACTOR SHALL REGRADE SITE AND REPLACE REMOVED TREES WITH 24" BOX TREES. NEW LOCATIONS AND TYPES OF TREES ARE AS SHOWN ON PLAN OR AS DIRECTED BY THE ENGINEER DURING CONSTRUCTION.
- 302 CONSTRUCT PCC DRIVEWAY APPROACH PER CITY STANDARD DRAWING 302. MATCH-UP LIMITS FOR DRIVEWAYS MAY CHANGE AT THE TIME OF CONSTRUCTION FROM LIMITS NOTED ON PLANS TO ENSURE PROPER TRANSITION BETWEEN PROPOSED AND THE EXISTING IMPROVEMENTS.
- 304 CONSTRUCT PCC WHEELCHAIR RAMP PER CITY STANDARD DWG 304. TYPE AND LOCATION OF RAMP MAY CHANGE DURING CONSTRUCTION TO FIT SITE CONDITION AS DIRECTED BY THE ENGINEER.

SPECIFIC NOTES:

- REMOVE PORTIONS OF EXISTING (8"-18" HIGH) MASONRY WALLS AND FOOTING THAT INTERFERE WITH PROPOSED IMPROVEMENTS AS SHOWN ON PLAN.
- REMOVE AND REPLACE EXISTING CURB AND GUTTER PER STANDARD DRAWING 200.
- REMOVE INTERFERING PORTION OF EXISTING FACILITIES AND MATCH WITH THE PROPOSED IMPROVEMENTS.
- CONSTRUCT 0'-6" RETAINING CURB.
- CONSTRUCT 8"-16" HIGH (6"x8"x16") MASONRY WALLS - MATCH EXISTING BLOCK AND COLOR. ADJUST WALL HEIGHTS TO MATCH EXISTING WALL HEIGHTS (IF ANY) AT PROPERTY LINE OR BACK OF SIDEWALK. TOP OF FOOTING SHALL BE AT LEAST 3.5" BELOW FINISH GRADE. FREE STANDING BLOCK WALL SHALL BE CONSTRUCTED PER CITY OF RIVERSIDE BUILDING DEPARTMENT 'FREESTANDING BLOCK WALL' STANDARD DRAWING
- CONSTRUCT 12"-24" HIGH DECORATIVE SPLIT FACE (6"x8"x16" CONCRETE BLOCK) RETAINING WALLS IN A NEUTRAL TAN/BEIGE COLOR - PER CITY STANDARD DRAWING 708.
- ADJUST EXISTING WATER METER BOXES TO MATCH PROPOSED SIDEWALK ELEVATION. REPLACE EXISTING GREEN WATER METER BOXES WITH CONCRETE BOXES. CONTRACTOR SHALL PICK UP REPLACEMENT CONCRETE WATER METER BOXES FROM THE CITY CORPORATION YARD LOCATED AT 8095 LINCOLN AVE, RIVERSIDE.
- COLD MILL AC PAVEMENT TO A DEPTH OF (0.10'-0.25') AT FLOW LINE. OVERLAY COLD MILLED AREA AFTER CURB AND GUTTER CONSTRUCTION FOR A VARIABLE DEPTH OF (0.08'-0.10') NEAR THE GUTTER AND MATCH-UP LINE.

Underground Service Alert
CALL BEFORE YOU DIG
CALL-TOLL FREE
1-800-227-2600
TWO WORKING DAYS BEFORE YOU DIG

ENGINEER IN RESPONSIBLE CHARGE
IBRAHIM A. MASSOUD
R.C.E. No. 64224 expires 6/30/09
DATE 8-5-08

REGISTERED PROFESSIONAL ENGINEER
IBRAHIM A. MASSOUD
No. 64224
Exp. 6-30-2009
CIVIL
STATE OF CALIFORNIA

DESIGNED BY: JUE
DRAWN BY: JUE
CHECKED BY: ADE

CITY OF RIVERSIDE, CALIFORNIA
PUBLIC WORKS DEPARTMENT
APPROVED BY: [Signature]
DATE: 8/14/08

RENAISSANCE SIDEWALK
CONSTRUCTION, 2006-2007
COLUMBIA AVE. SIDEWALK
(TURLEY ST. TO ORANGE ST.)
SCALE: 1" = 40'

ACCT. NO.: 9594627-440223
R-4014-A
SHEET 1 OF 1
FILE NO.

C:\COMMON\Design Projects\08-021-Misc_Sidewalk_Construction-Adams_Bandini_Masaud & Third St_Design Plans\Transportation\Columbia\18-4014.dwg