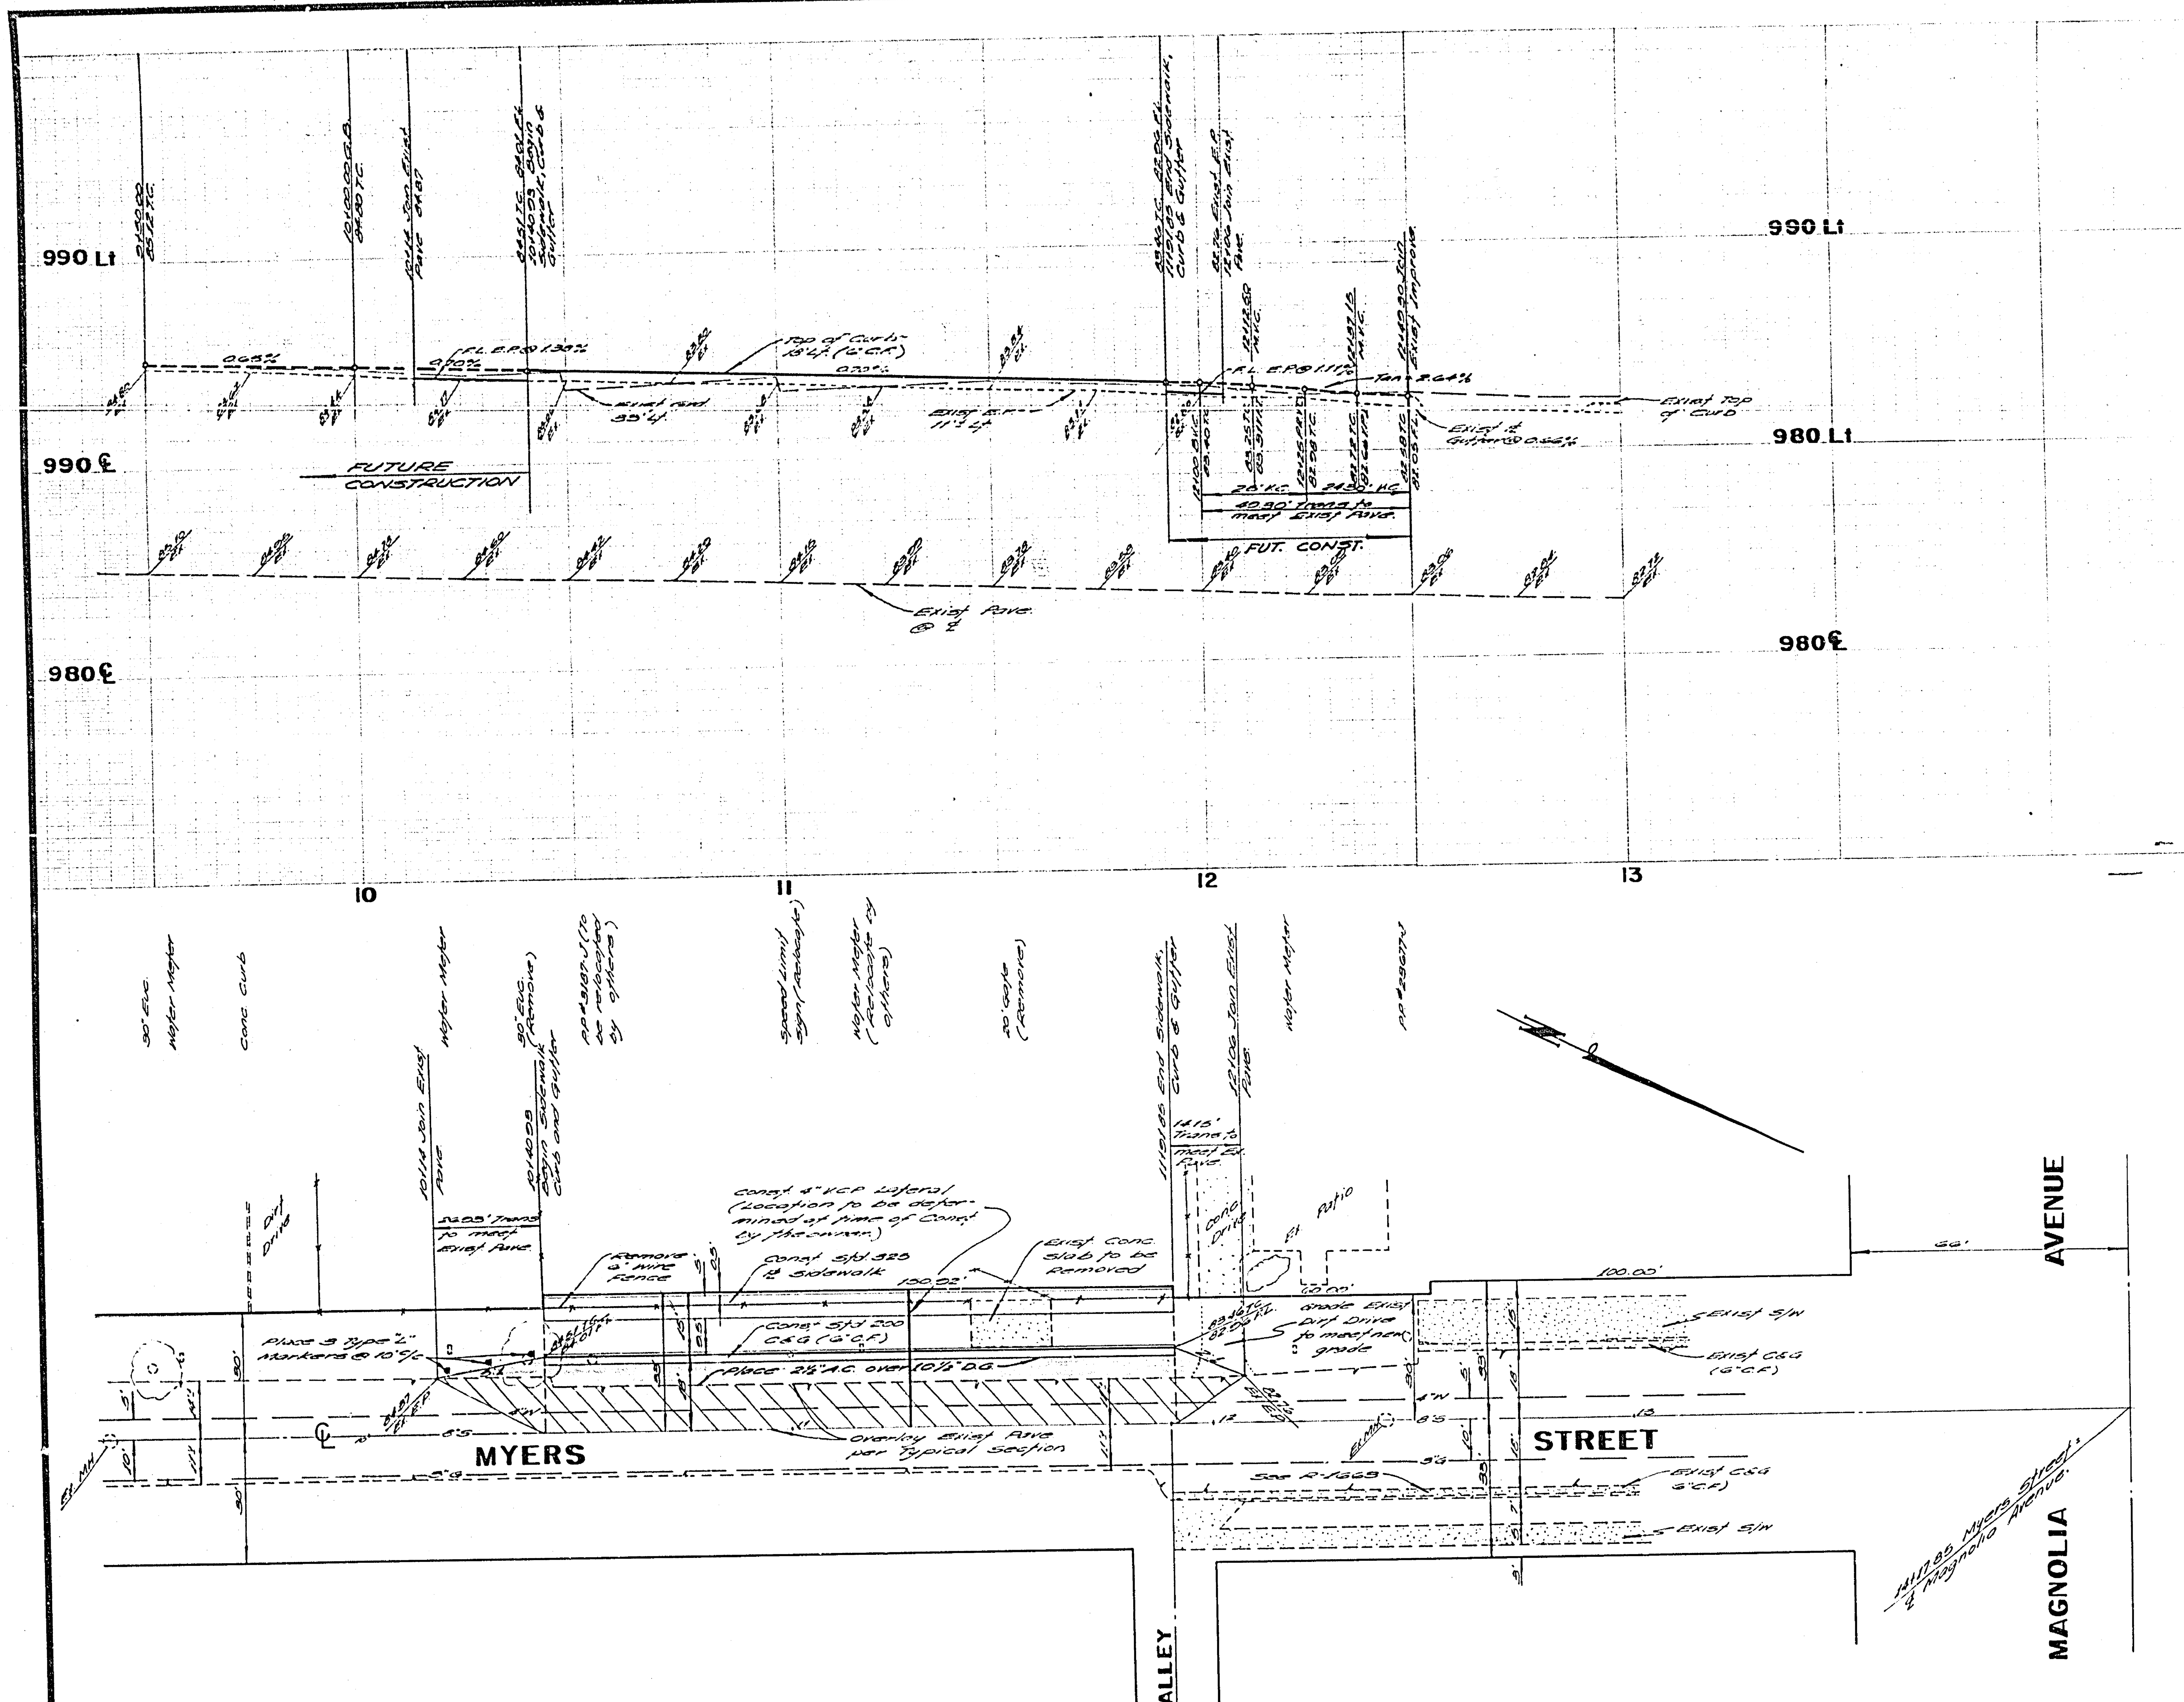

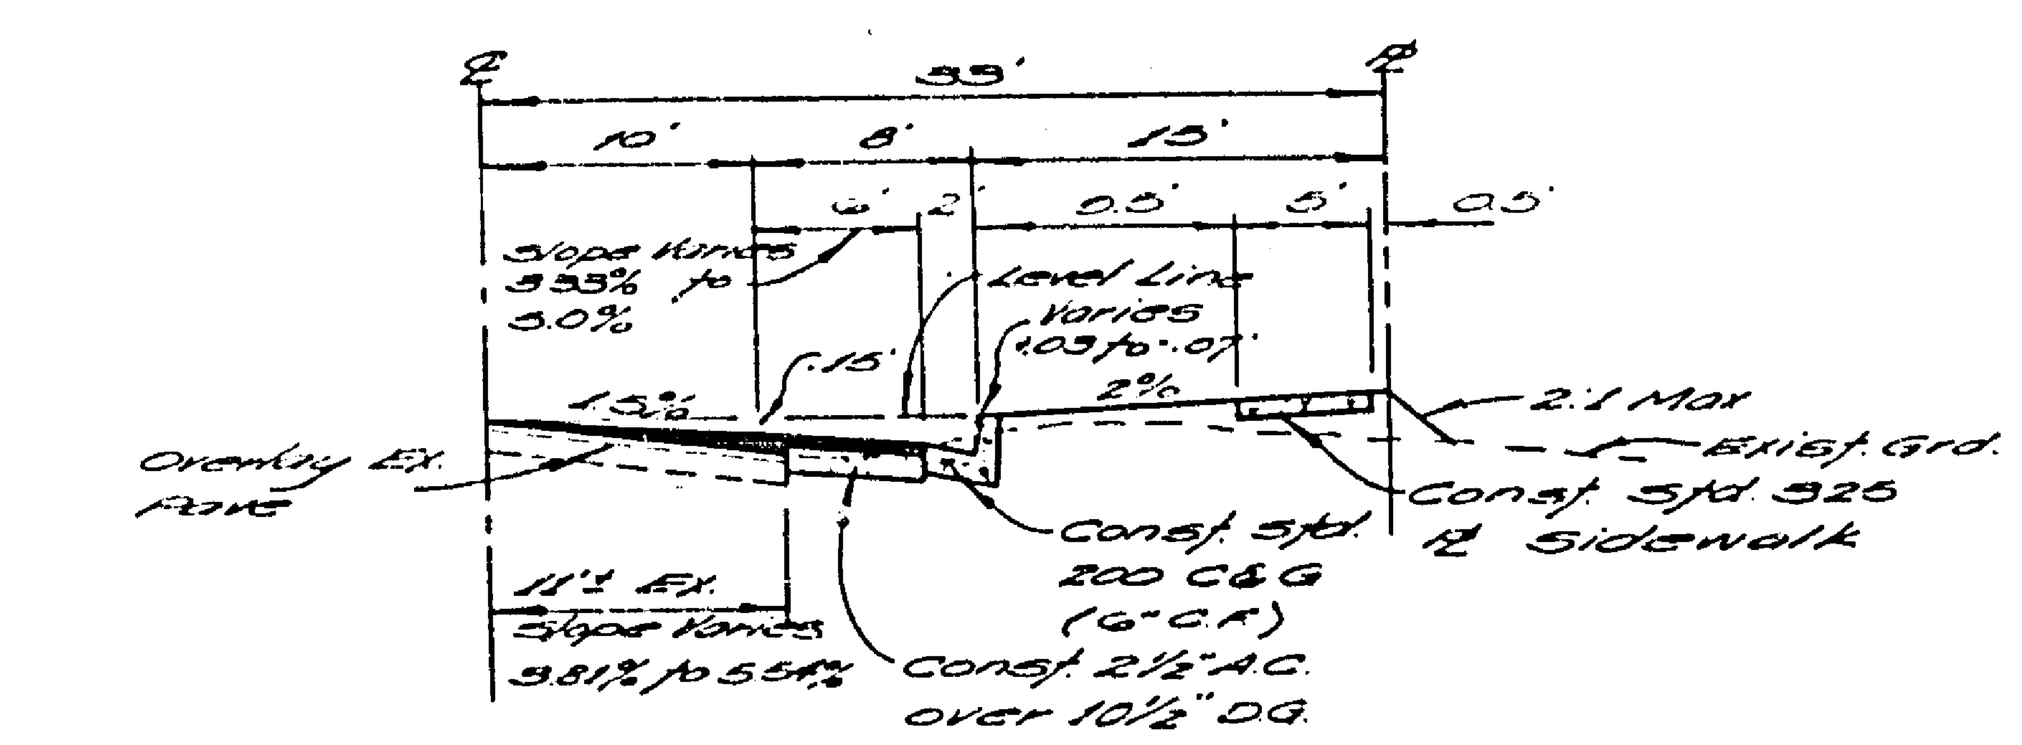

TYPICAL SECTION

MYERS STREET

From Sta. 10140.03 to Sta. 11119.85
No Scale
T.I. = 5.0

GENERAL NOTES

1. Construction shall be in accordance with the Standard Specifications for Public Works Construction, 1973 Edition and per City of Riverside Standard Drawings.
2. All flagged elevations shall be staked in the field by the Engineer
3. Location of the driveway approach (Std. 302, A=24' B=38') to be determined at the time of construction as approved by the Traffic Engineer.
4. Curb and Gutter to be staked at a 3' offset and at 25' intervals.
5. It shall be the responsibility of the contractor to clear the right of way in accordance with the provisions of law as it affects each utility including irrigation lines & appurtenances and at no cost to the City.
6. Trim edge of existing pavement where new pavement joins to a smooth straight line. Construct match-up paving as shown on plan and overlay paving as directed in the field to produce a smooth section. Engineer estimates overlay to be 6.5 tons.

BENCH MARK

City of Riv. B.M. No. 0-33 Elev. 788.349
of the main entrance of Arlington Pub. Library
E. Side, a Std. disk Stamped 0-33 1924, approx.
1' above ground

ALBERT A. WEBB ASSOCIATES CIVIL ENGINEERS RIVERSIDE, CALIFORNIA	APPROVED BY [signature] DATE 6/21/74 R.E. No. 9976
W.O. 74-111 FOR: William Austin	F.B. 1034
MARK / REVISIONS / APPR. / DATE	
DESIGNED BY RLT	DRAWN BY RLT / CHECKED BY BM

CITY OF RIVERSIDE, CALIFORNIA
PUBLIC WORKS DEPARTMENT

APPROVED BY	BY	DATE
PRINCIPAL ENGINEER		7/31
PARK DEPARTMENT		8-1
TRAFFIC DIVISION		
CHIEF PUB. WKS. ENGR.		9-16

APPROVED BY [signature]
DIRECTOR OF PUBLIC WORKS
DATE 9-19-74

STREET PLAN AND PROFILE

MYERS STREET
S'ly side from 226' to 377'± SE'ly of Magnolia Ave.
ZONING CASE GP-42-734 & R-44-550

SCALE: Horiz: 1"=20' Vert: 1"=4'

ACCOUNT No.
DRAWING NUMBER
R-1778
SHEET 1 OF 1
74-111-A