PLATE 1—PLAN PROFILE B. P. R. STANDARD
THE FREDERICK POST CO., Chicago

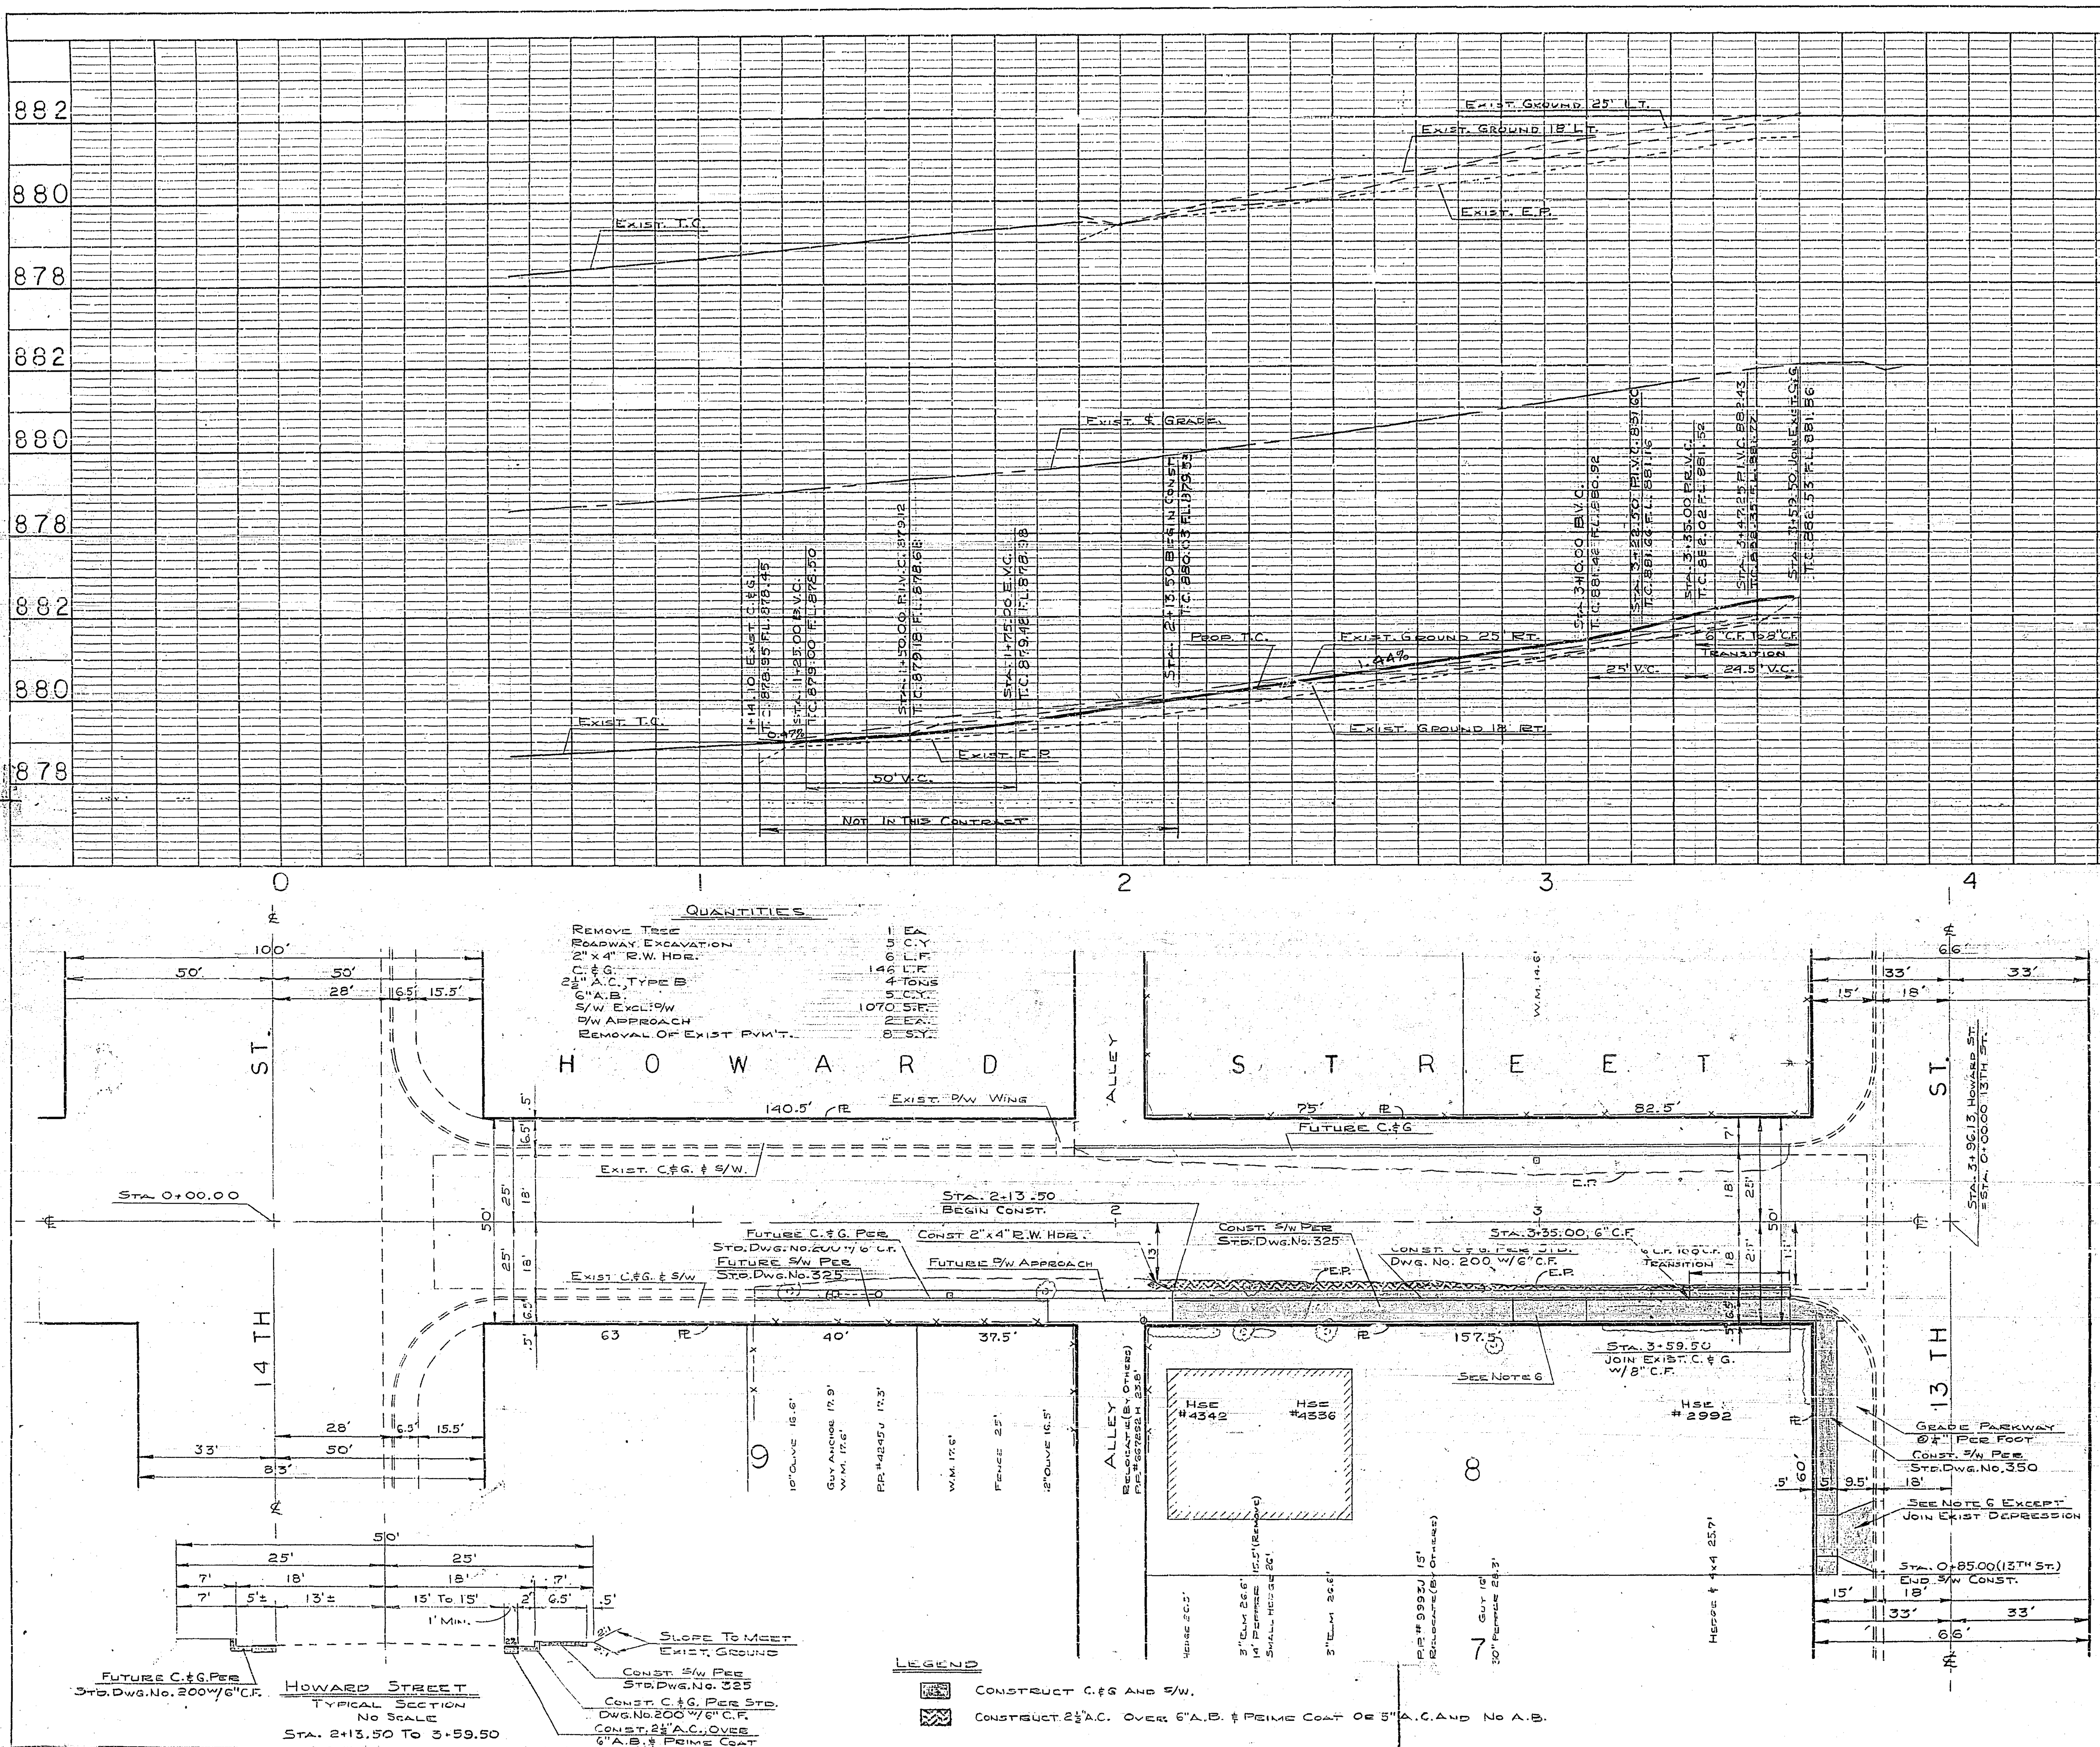

B.M. 885.55 = S&L in N.W. C.R. 14th & Park at E.C.R.

F.B. P-2 56-58

Scale: Horiz. 1" = 20', Vert. 1" = 2"

Quantities

Remove Tree	1 EA.
Roadway Excavation	5 C.Y.
2" x 4" R.W. Hdr.	6 L.F.
C. & G.	146 L.F.
2½" A.C., Type B	4 Tons
6" A.B.	5 C.Y.
S/W Excl. D/W	1070 S.F.
D/W Approach	2 EA.
Removal Of Exist Pvm't.	8 S.Y.

Legend

- Construct C.&G. And S/W.
- Construct 2½" A.C. Over 6" A.B. & Prime Coat Or 5" A.C. And No A.B.

Notes:

1. All Construction Shall Be In Accordance With Standards And Specifications No. 461 Of The City Of Riverside, Department Of Public Works.
2. Trim Edge Of Paving To Clean Straight Line. Construct Match Up Paving As Shown And Overlay Existing Paving As Directed In The Field To Produce A Smooth Crown Section.
3. It Shall Be The Responsibility Of The Contractor To Clear The Right Of Way In Accordance With The Provisions Of The Law As It Affects Each Utility, Including Irrigation Lines And Appurtenances, And At No Cost To The City.
4. Remove All Trees In Right Of Way Within Limits Of Construction.
5. Prime Coat, Paint Binder, And Seal Coat Will Be Required.
6. Construct Driveway Approach Per Standard Drawing No. 302, A=10', B=17'. Location To Be Determined By Property Owner.
7. Provide Transition From S/W To Exist Graded Parkway At 5%.

PROFILE	BY	DATE
Note Book No.		
Surveyed		
Plotted		
Grades Checked		
B.M.'s Noted		
Structure Notations Chk'd		

PLAN	BY	DATE
Note Book No.		
Surveyed		
Plotted		
Alignment Checked		
Rt. of Way Checked		

REVISIONS		
MARK	DATE	DESCRIPTION

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

HOWARD STREET
13 TH ST. TO 14 TH ST.

13TH — Howard St. To 85' East

Designed by G.S.P. | Submitted by William D. Gardner | Approved by Martinek, Director of Public Works | Proj. No. 1012

Drawn by A.F.W. | Park Dept. E.P.K. | Traffic Div. [illegible]

Checked by | Recommended by William D. Gardner, Asst. Assistant City Engineer | Date 7-24-63

R-705

Sheet 1 of 1

[redacted]