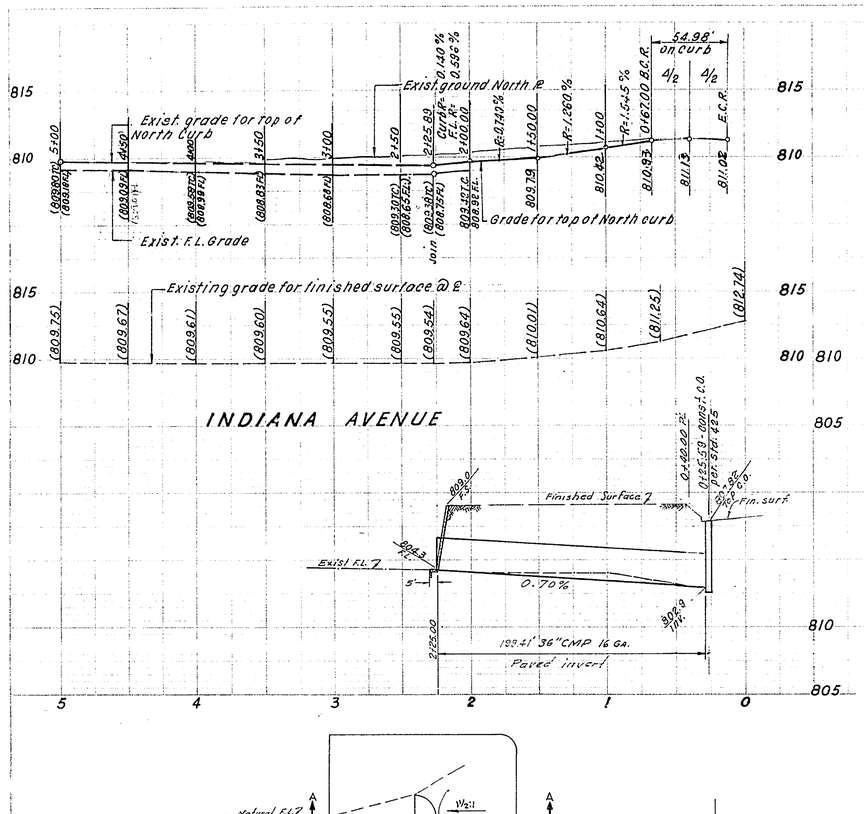

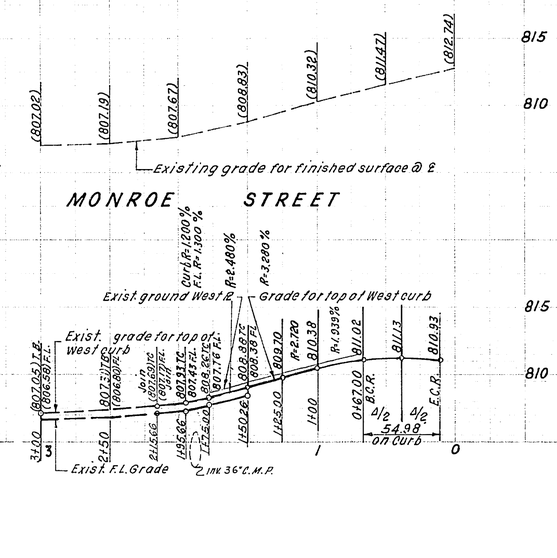

GENERAL NOTES:

1. It shall be the responsibility of the Contractor to clear the right of way in accordance with the provisions of law as it pertains to each utility, including irrigation lines and appurtenances and at no cost to the City.
2. Construction shall be in accordance with the City of Riverside Department of Public Works Specifications No. 461 and Standard drawings.
3. Trimmage of existing paving where new paving joins existing pavement to a clean straight line. Construct match-up paving as shown and overlay paving as directed in the field to produce a smooth crown section. Engineer estimates overlay to be 55 tons.
4. Prime coat and paint binder are required.
5. The finished sub-Grade shall have a compaction of not less than 90% for a depth of 0.5 Ft. As determined by Test Method No. Calif. 216 F immediately prior to placement of the cover.
6. Existing Street name & stop signs to be relocated. Street name sign to be installed per. std. 662.
7. Grading will require a permit under ord. No. 3093 for a cut or fill exceeding 100 cy., or a fill over one ft. in depth.

QUANTITY ESTIMATE

Std. 200 Curb & Gutter (8" C.F.)	297 L.F.
Std. Sidewalk	625 Sq.F.T.
Remove exist. curb & gutter	340 L.F.
Remove exist. sidewalk	625 Sq.F.T.
2 1/2" A.C. Pavmt and seal coat	3200 Sq.F.T.
3" Imported Base Material	30 Cu.yd.
Recap with variable thickness A.C.	4500 Sq.F.T.
36" C.M.P. 16 Ga.	199.41 L.F.

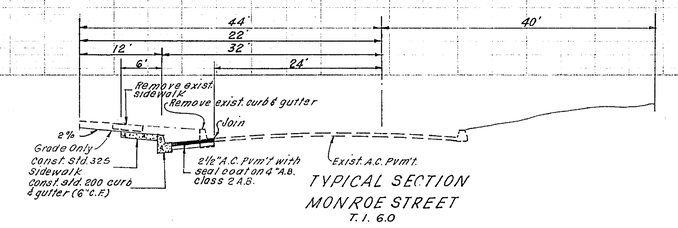

TYPICAL SECTION
MONROE STREET
T. I. 6.0

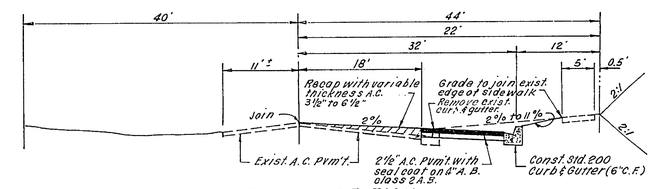

TYPICAL SECTION
INDIANA AVENUE
T. I. 6.0

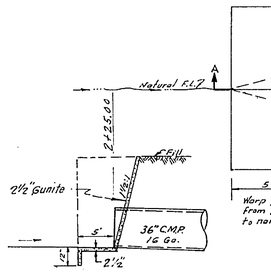

SECTION A-A

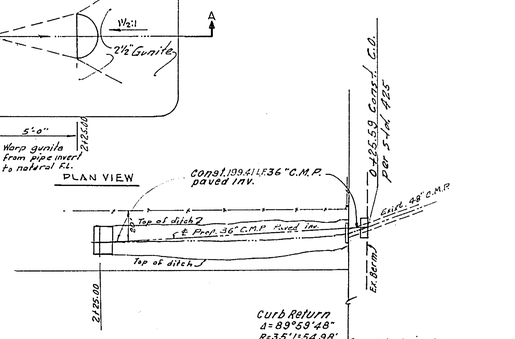

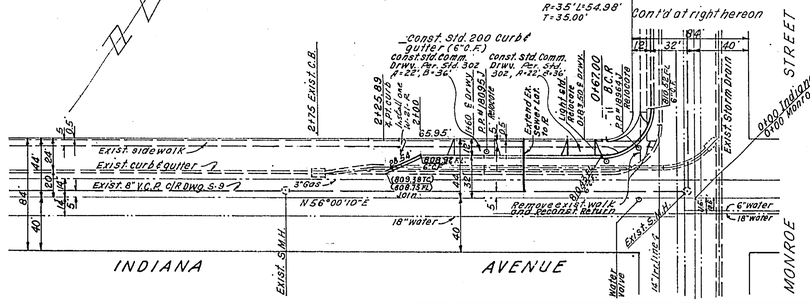

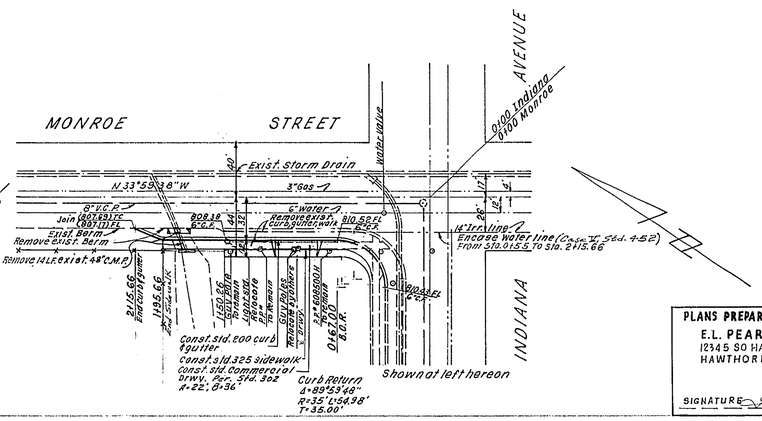

PLANS PREPARED BY:
E.L. PEARSON & ASSOCIATES
12345 SO HAWTHORNE WAY.
HAWTHORNE, CALIFORNIA
SIGNATURE [signature] RE NO. 9757

S.R. 81 R=55 SS 343

REVISION		
MARK	DATE	DESCRIPTION

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

STREET PLAN & PROFILE
INDIANA AVENUE
MONROE ST. TO 230'± WESTERLY NORTH SIDE
MONROE STREET
INDIANA AVE. TO 150'± NORTHERLY WEST SIDE
R-89-656

DATE SEPT. 8, 1966	SCALE HORIZ. 1"=50' VERT. 1"=5'	APPROVED BY [signature] DIRECTOR OF PUBLIC WORKS	NO. R-1193
DRAWN R.D.S.	W.O.		
CHECKED [signature]	F.B.	DATE 1-9-67	SHEET 1 OF 1