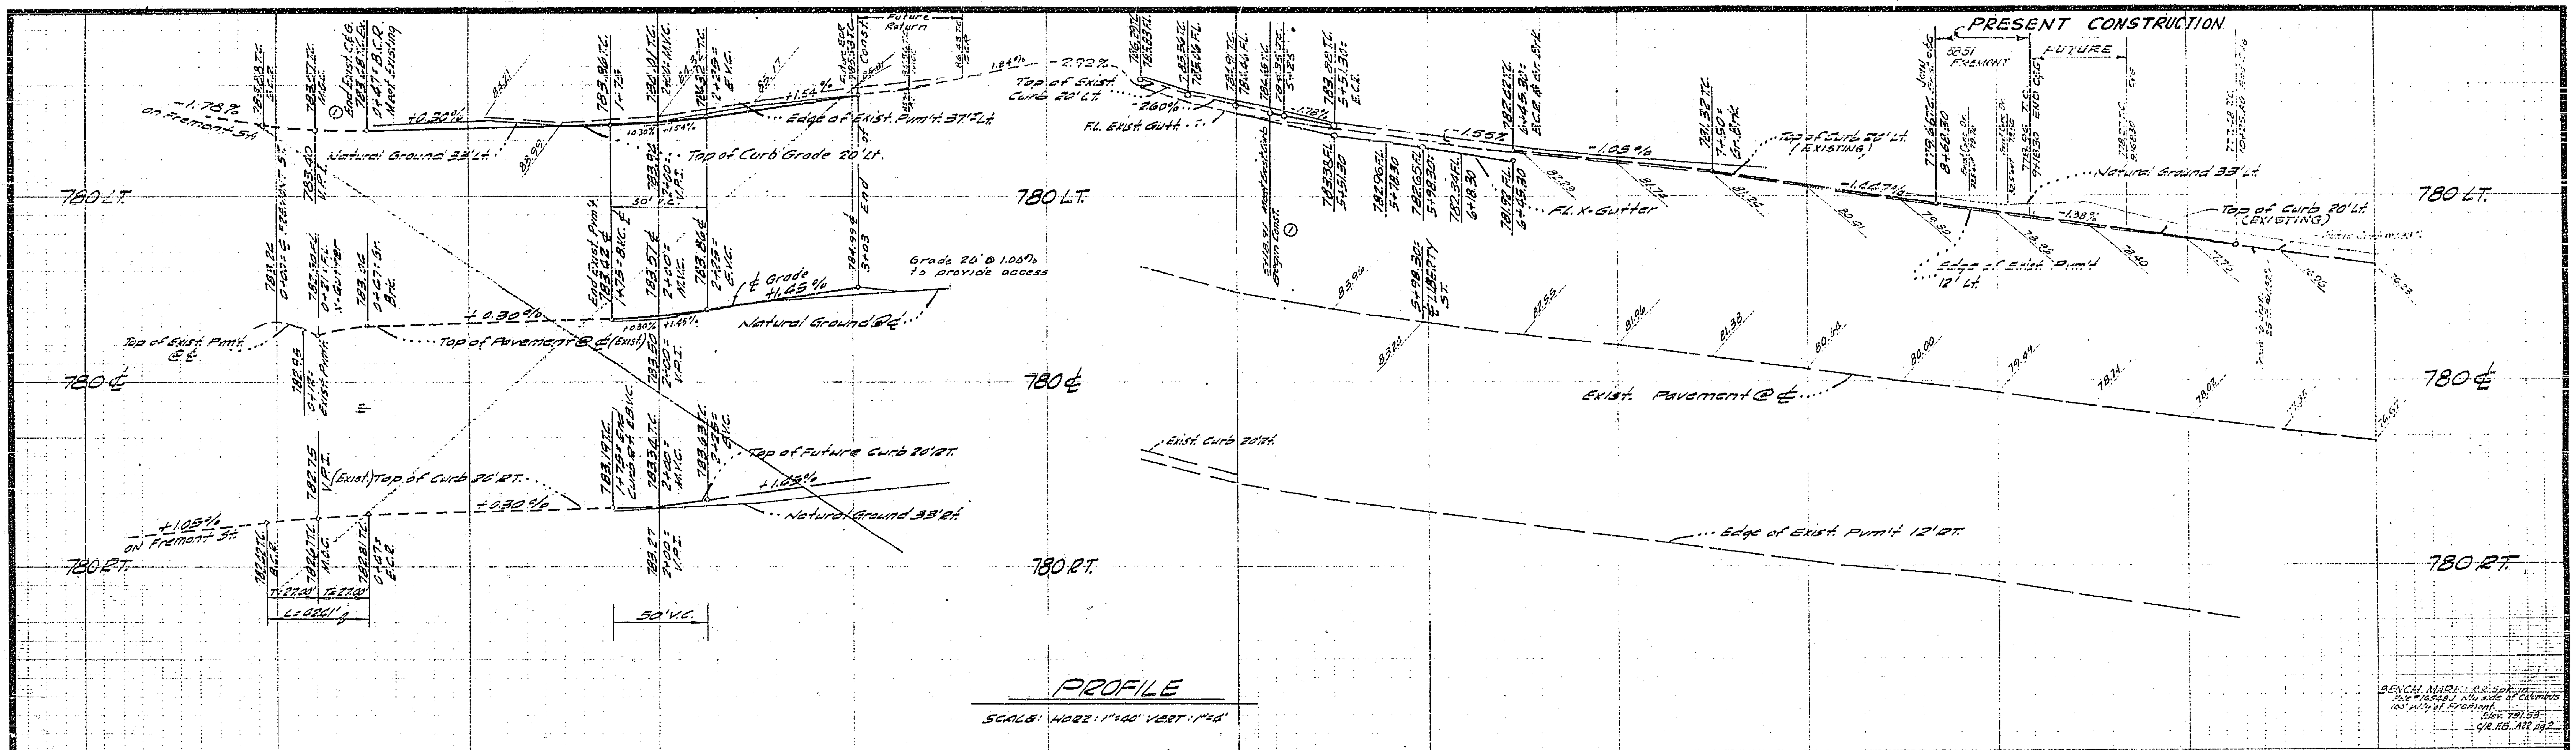

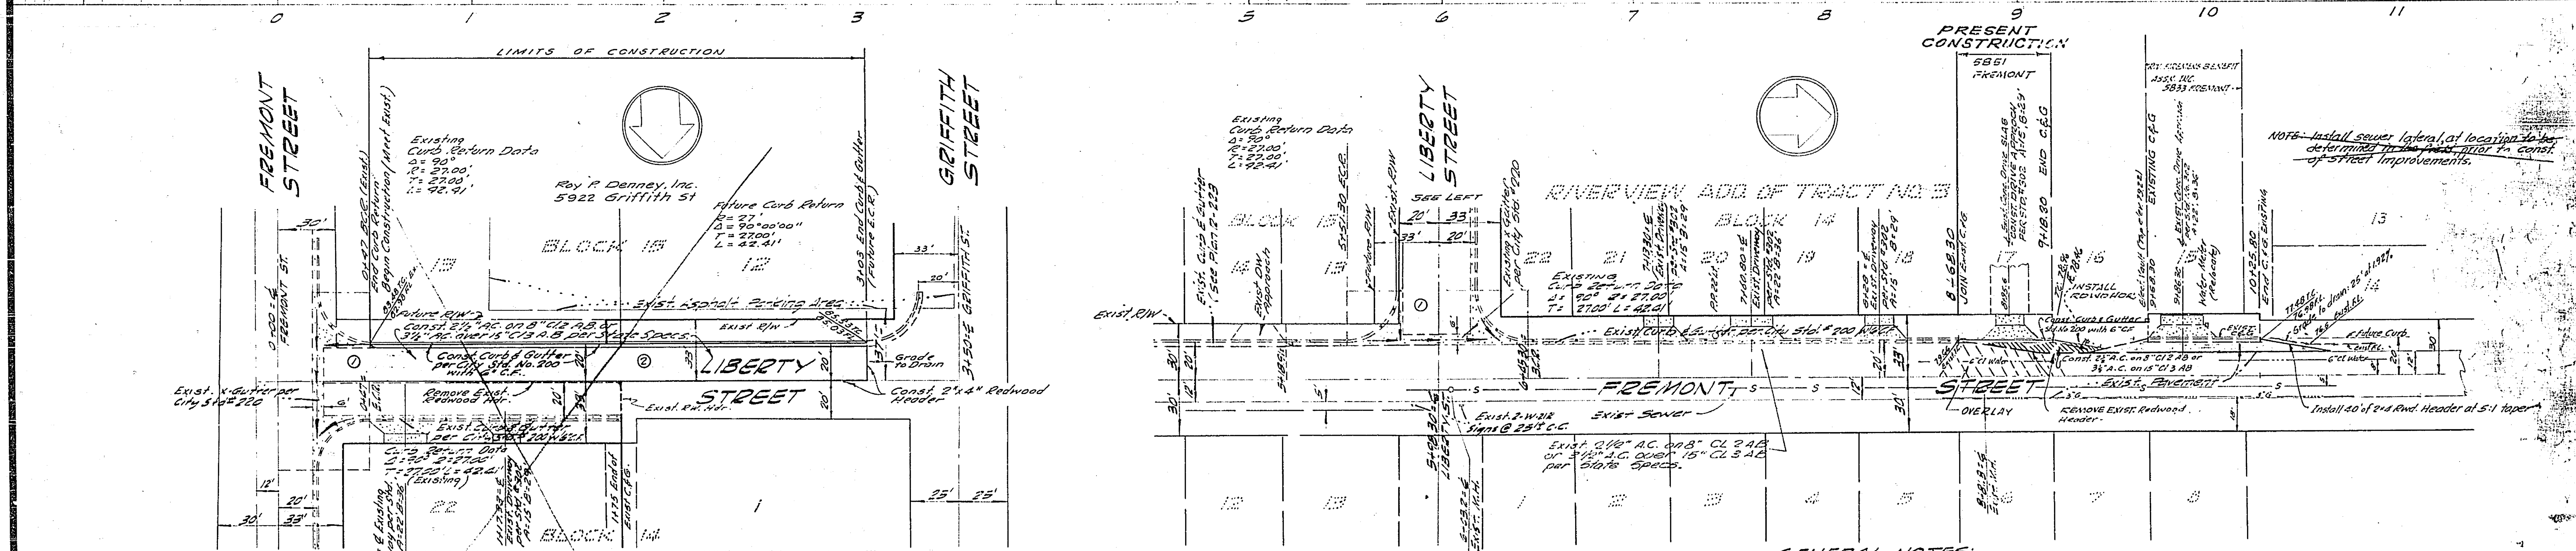

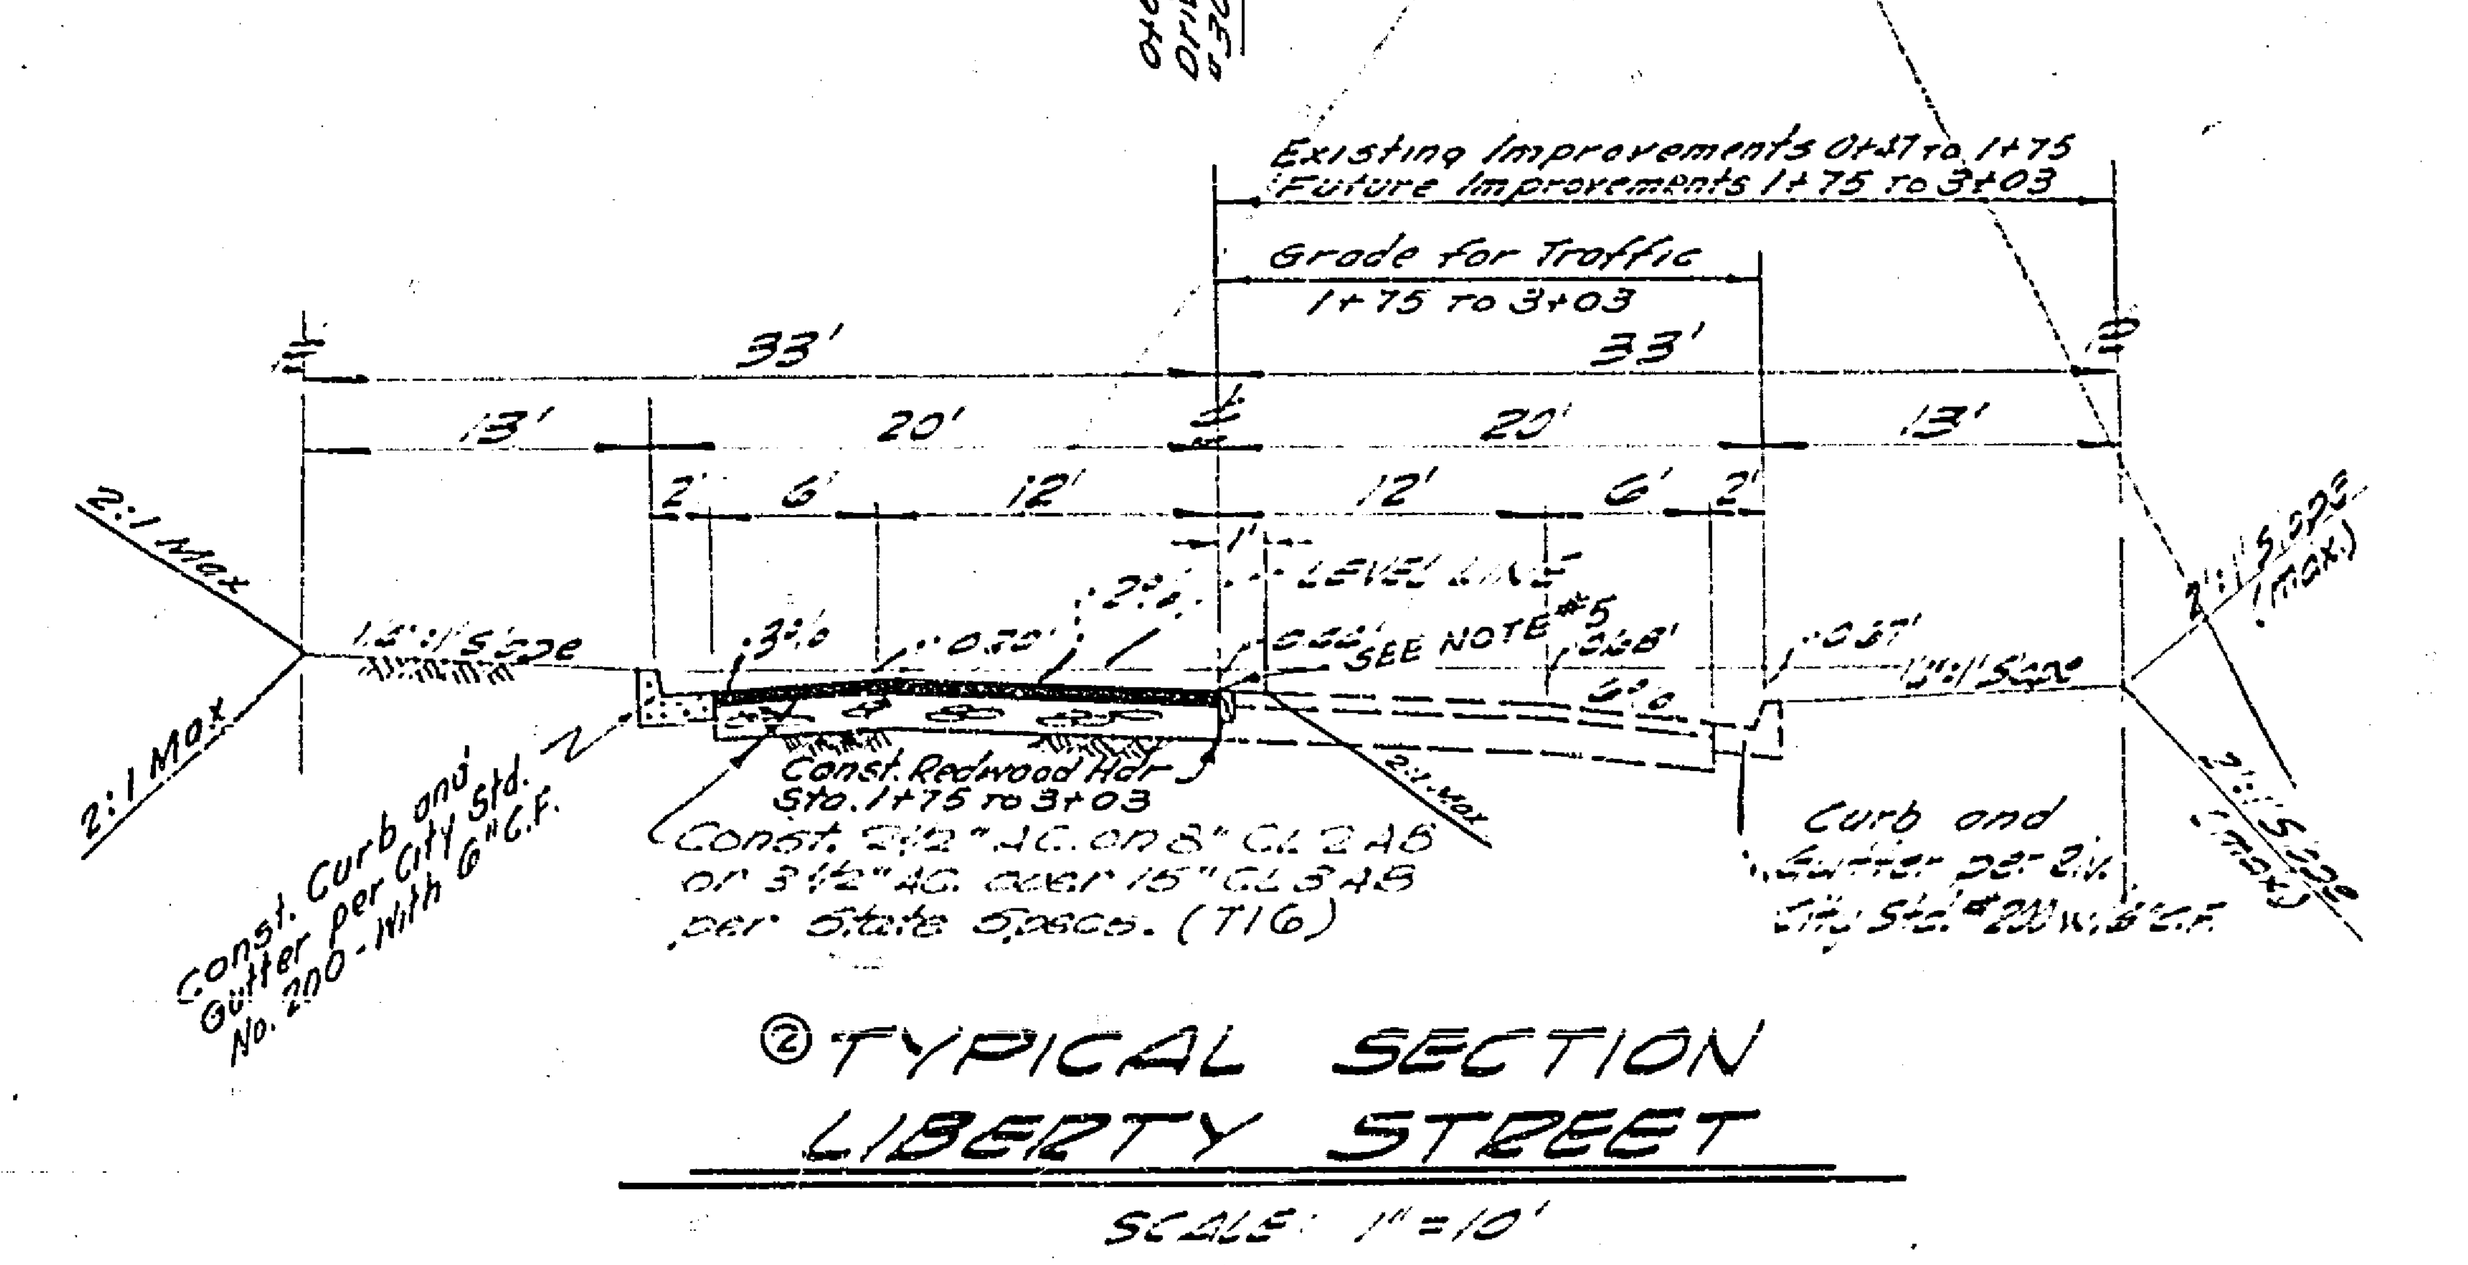

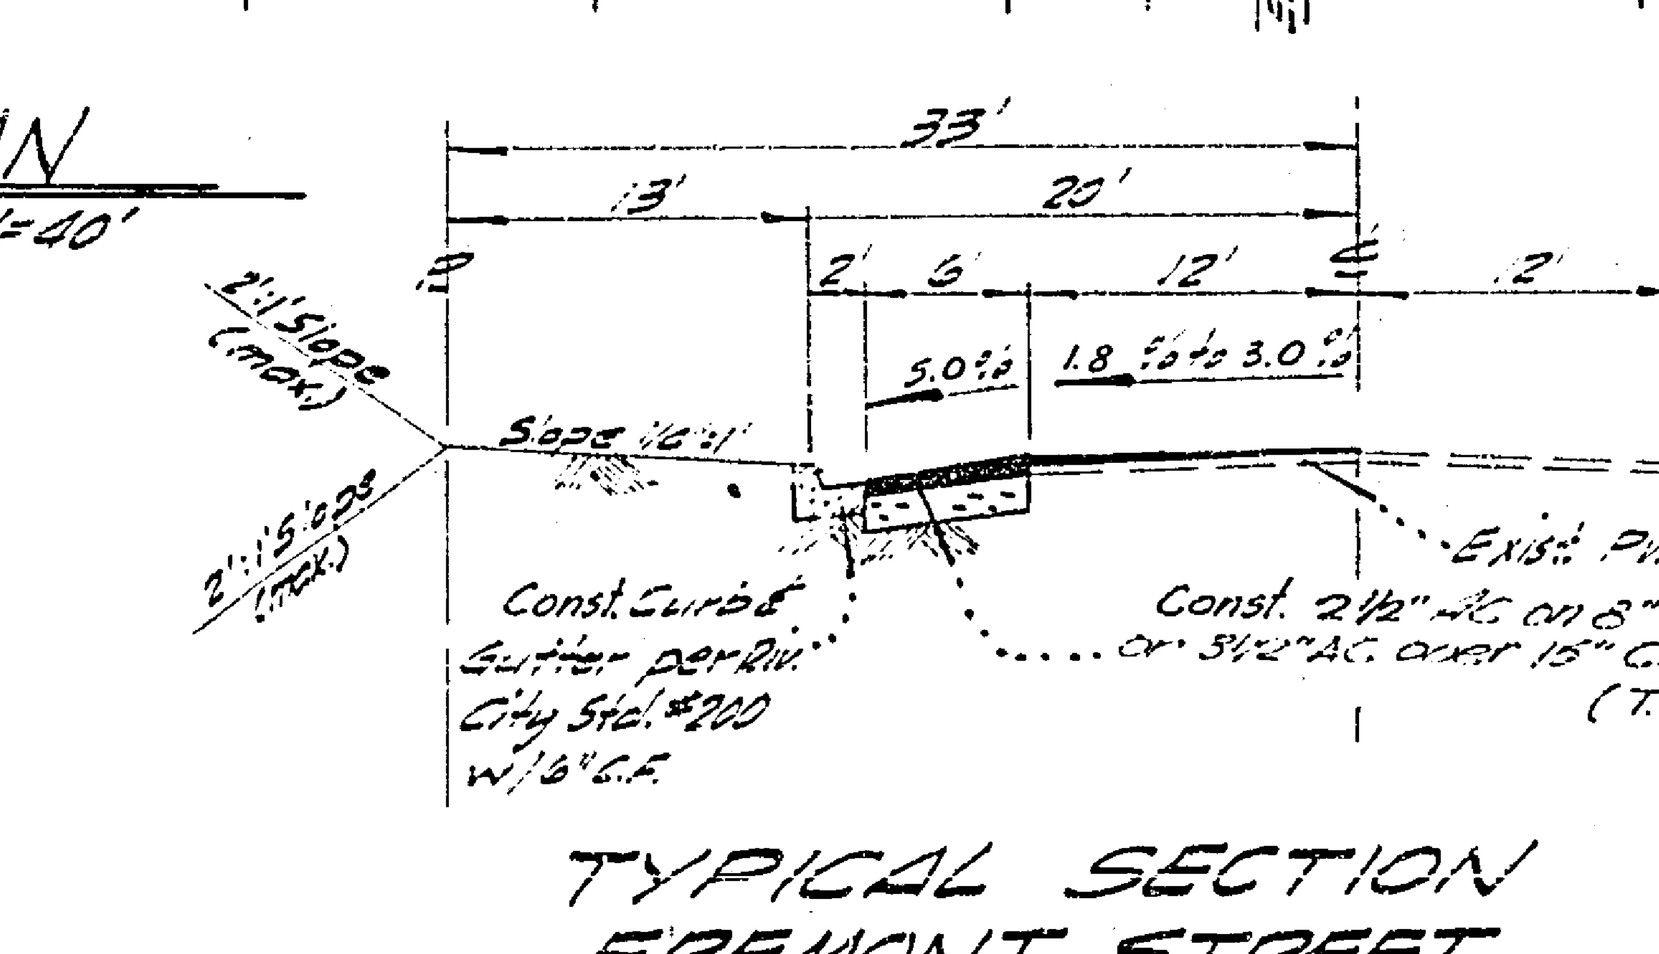

GENERAL NOTES:

1. It shall be the responsibility of the contractor to clear the right of way in accordance with the provisions of law as it affects each utility including irrigation lines and appurtenances and at no cost to the city.
2. Construction shall be in accordance with the city of Riverside, Department of Public Works, Specifications No. 461 and Standard Drawings.
3. Prime coat, seal coat, and paint binder are required.
4. ~~Grading will require a permit under Ordinance 3093 for a cut or a fill exceeding 100 cubic yards, or a fill over one foot in depth.~~
5. Trim edge of existing pavement, where new paving joins existing pavement, to a clean, straight line. Construct match-up paving as shown and overlay as directed in the field to produce a smooth crown section. Estimated overlay = 1 ton.

NOTE: REFERENCE PLAN: R-1340

J.O. 2041, F.B. 30/29, F.B. 64/45/51

HAWKINS, ROBERTSON & ASSOC.
ENGINEERS AND SURVEYORS
RIVERSIDE, CALIFORNIA

F.B. 64/45-51, 30/28
APPROVED: Charles E. Robertson — DATE: 10-6-70
R.E. No. 15016
FOR: L & M ENTERPRISES

MARK	REVISIONS	APPR.	DATE

DESIGNED BY ____ DRAWN BY ____ CHECKED BY 79

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

APPROVED BY	BY	DATE
OFFICE ENGINEER	CWJ	11/17
PARK DEPARTMENT	---	---
TRAFFIC DIVISION	CCJ	11/16
ASSISTANT CITY ENG.	Haus	11/17

APPROVED BY William D. Gardner
DIRECTOR OF PUBLIC WORKS
DATE 11/16/70

STREET PLAN & PROFILE

FREMONT STREET
West side, 270' Northerly of Liberty Street
Building Permit - 5851 Fremont St.

HORIZ. SCALE: 1" = 40' VERT. SCALE: 1" = 4'

PROJECT NO. R-1458
SHEET 1 OF 1
FILE NO. 4188